


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

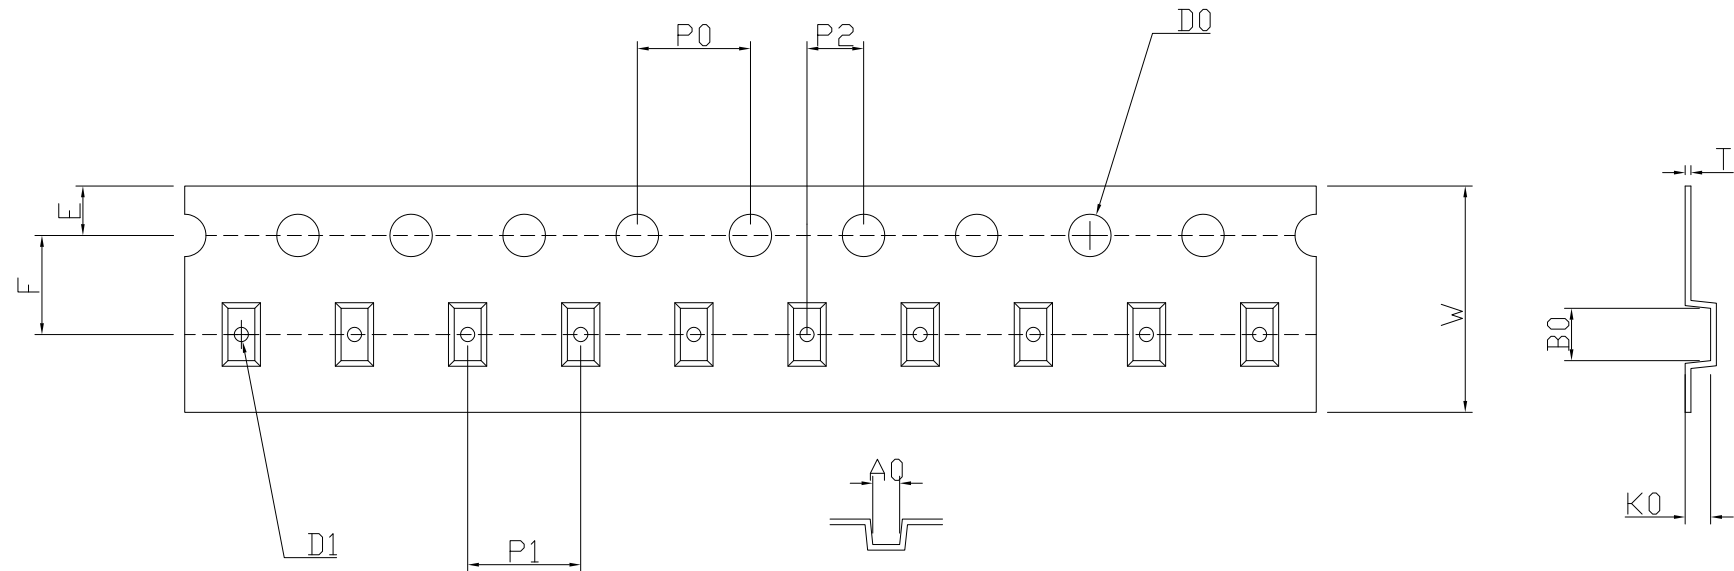

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 $\text{\textcircled{E}}$	D_1 $\text{\textcircled{E}}$	P_0 $\text{\textcircled{A}}$	P_2 $\text{\textcircled{A}}$	E $\text{\textcircled{A}}$						
$1.50^{+0.10}_{-0.00}$	$0.50_{\pm 0.08}$	$4.00_{\pm 0.10}$	$2.00_{\pm 0.05}$	$1.75_{\pm 0.10}$						
ITEM	W $\text{\textcircled{E}}$	A_0 $\text{\textcircled{A}}$	A_1 $\text{\textcircled{A}}$	B_0 $\text{\textcircled{A}}$	B_1 $\text{\textcircled{A}}$	K_0 $\text{\textcircled{C}}$	K_1 $\text{\textcircled{C}}$	P_1 $\text{\textcircled{A}}$	F $\text{\textcircled{A}}$	T $\text{\textcircled{E}}$
DIM	$8.00_{\pm 0.10}$	$0.95_{\pm 0.05}$		$1.85_{\pm 0.05}$		$0.50_{\pm 0.05}$	± 0.10	$4.00_{\pm 0.10}$	$3.50_{\pm 0.05}$	$0.20_{\pm 0.05}$
ALTERNATE										

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: ABS black conductive materials
- 5.One 22" Reel=1,010 Meters

RoHS Compliance	NAME.	CARRIER TAPE	PN	0603	SIZE	A4	DSGD		DIM TOL	Ang Tol	
	Mold Ref	0.95*1.85*0.50	Customer P/N		SHEET	1/1	PROJ		$X \pm 0.30$	$X.XX \pm 0.10$	$X^X \pm 5'$
	MATERIAL	ABS black conductive	SCALE	1:1	REV	A/0	CHKD		$X.X \pm 0.20$	$X.XXX \pm 0.05$	$.XX \pm 3'$
			UNIT	MM	DATE		APPD				$\text{\textcircled{A}}$ $\text{\textcircled{E}}$