


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

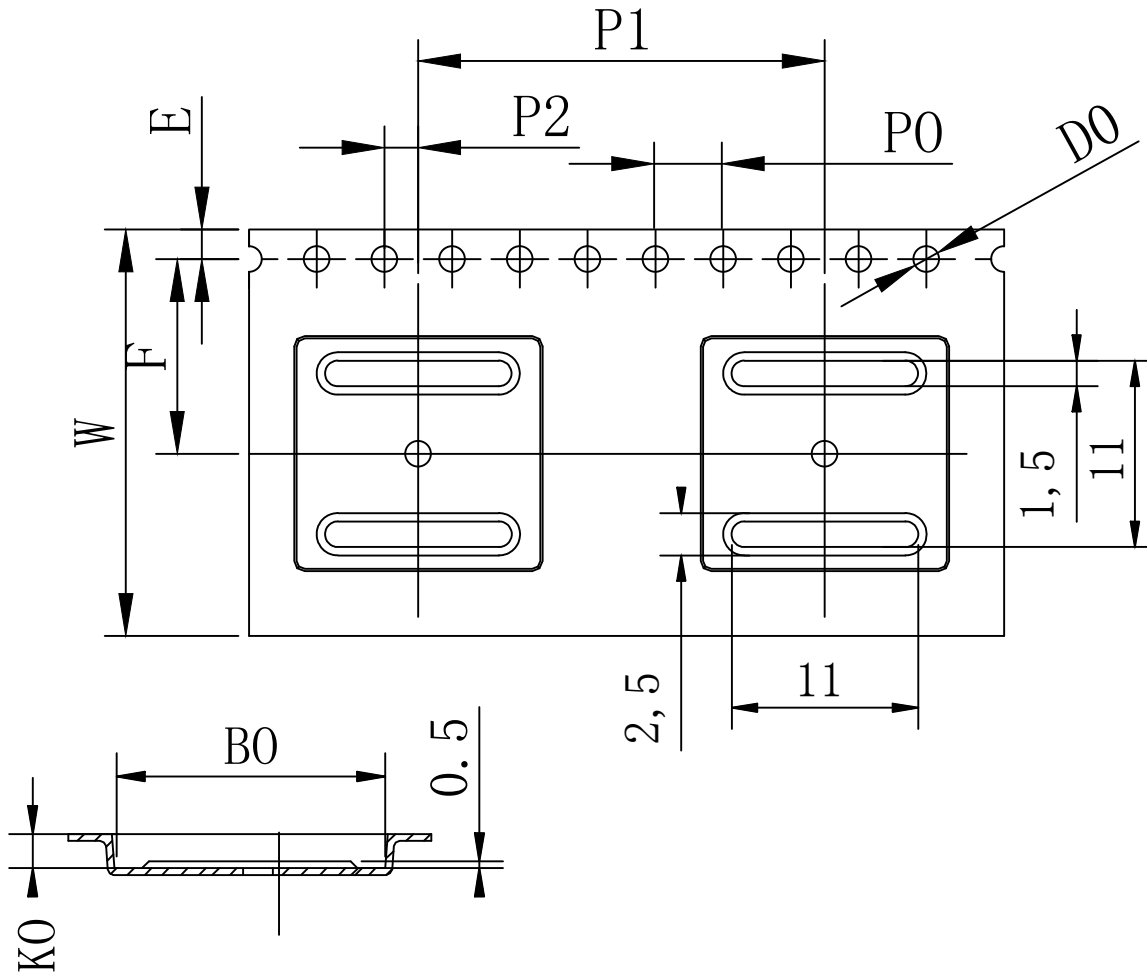

Not Marked tolerance $\pm 0.2\text{mm}$

$D_0 \text{ (E)}$	$D_1 \text{ (E)}$	$P_0 \text{ (A)}$	$P_2 \text{ (A)}$	$E \text{ (A)}$
$1.50^{+0.10}_{-0.00}$	$1.50^{+0.10}_{-0.00}$	4.00 ± 0.10	2.00 ± 0.10	1.75 ± 0.10

ITEM	$W \text{ (E)}$	$A_0 \text{ (A)}$	$A_1 \text{ (A)}$	$B_0 \text{ (A)}$	$B_1 \text{ (A)}$	$K_0 \text{ (C)}$	$K_1 \text{ (C)}$	$P_1 \text{ (A)}$	$F \text{ (A)}$	$T \text{ (E)}$
DIM	24.00 ± 0.30	14.40 ± 0.10	± 0.10	14.40 ± 0.10	± 0.10	2.10 ± 0.10	1.60 ± 0.10	24.00 ± 0.10	11.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

- The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PS black
- One 22" Reel=90 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	Q12*12-P24	SIZE	A4	DSGD		DIM TOL	Ang Tol	
	Mold Ref	14.40*14.40*2.10	Customer P/N		SHEET	1/1	PROJ		$X \pm 0.30$	$X.XX \pm 0.10$	$X \pm 5'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		$X.X \pm 0.20$	$X.XX \pm 0.05$	$.XX \pm 3'$
			UNIT	MM	DATE	20220401	APPD				$.XX \pm 1'$

