
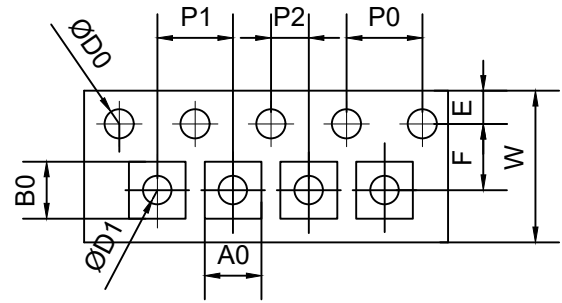
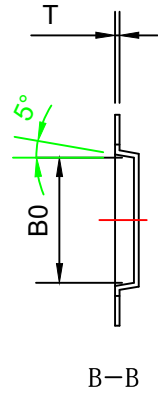


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE
 DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

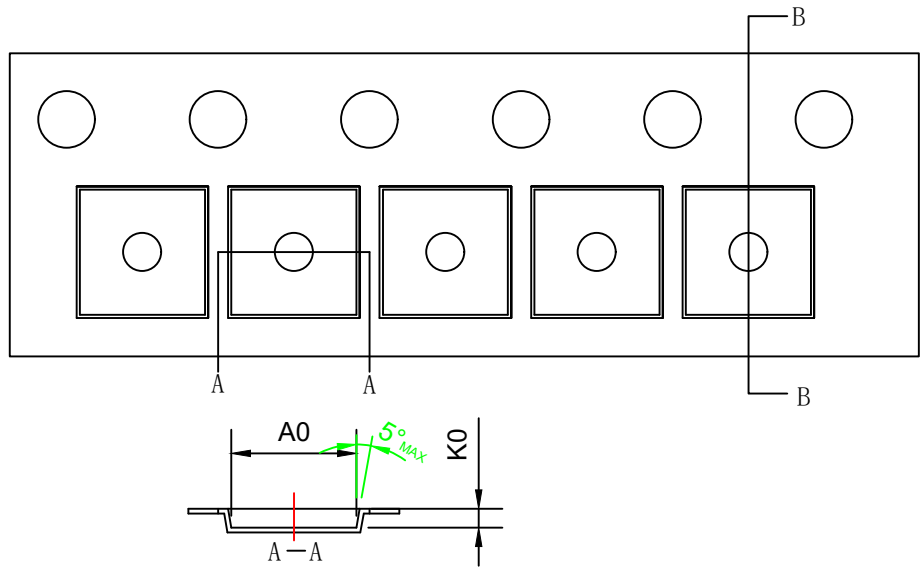

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 Ⓢ	D_1 Ⓢ	P_0 Ⓢ	P_2 Ⓢ	E Ⓢ						
1.50 ± 0.10	1.00 $+0.25$	4.00 ± 0.10	2.00 ± 0.05	1.75 ± 0.10						
ITEM	W Ⓢ	A_0 Ⓢ	A_1 Ⓢ	B_0 Ⓢ	B_1 Ⓢ	K_0 Ⓢ	K_1 Ⓢ	P_1 Ⓢ	F Ⓢ	T Ⓢ
DIM	8.00 ± 0.3	3.30 ± 0.10		3.30 ± 0.10		1.00 ± 0.10		4.00 ± 0.10	3.50 ± 0.05	0.25 ± 0.03
ALTERNATE										

- The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PC black conductive
- One 22" Reel=500 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	DFNWB3X3	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	3.30x3.30x1.00	Customer P/N		SHEET	1/1	PROJ		X ± 0.30 X.XX ± 0.10 X $\pm 5'$.X $\pm 3'$
	MATERIAL	PC black conductive	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20 X.XXX ± 0.05 .XX $\pm 1'$	
			UNIT	MM	DATE	2022-04-09	APPD			

