


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					

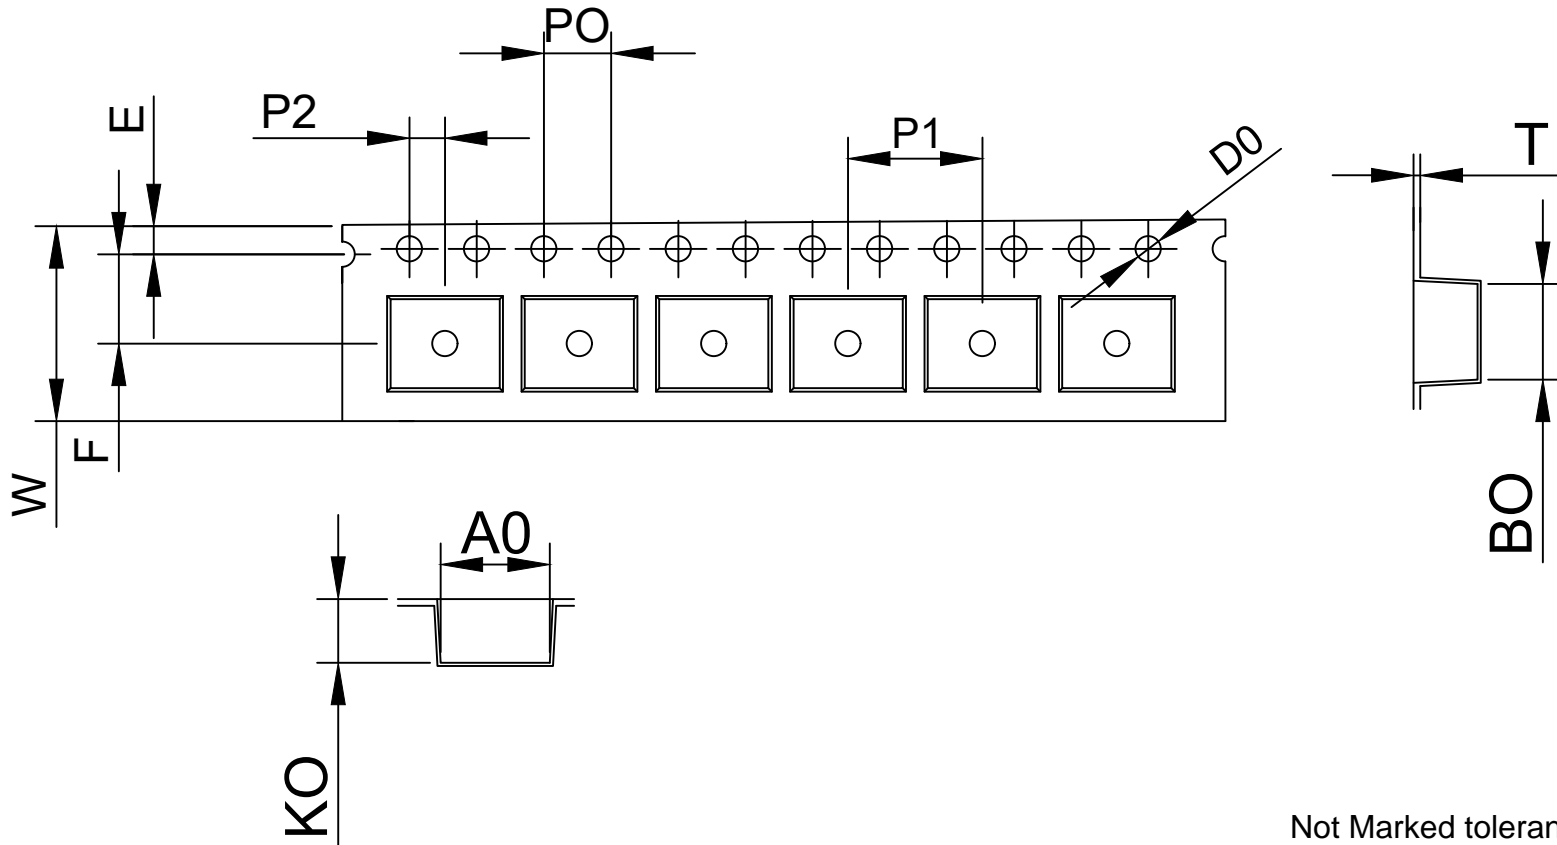

Not Marked tolerance  $\pm 0.2\text{mm}$

$D_0$ $\text{Ⓢ}$	$D_1$ $\text{Ⓢ}$	$P_0$ $\text{Ⓢ}$	$P_2$ $\text{Ⓢ}$	$E$ $\text{Ⓢ}$					
1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	4.00 $\pm 0.10$	2.00 $\pm 0.10$	1.75 $\pm 0.10$					
$W$ $\text{Ⓢ}$	$A_0$ $\text{Ⓢ}$	$A_1$ $\text{Ⓢ}$	$B_0$ $\text{Ⓢ}$	$B_1$ $\text{Ⓢ}$	$K_0$ $\text{Ⓢ}$	$K_1$ $\text{Ⓢ}$	$P_1$ $\text{Ⓢ}$	$F$ $\text{Ⓢ}$	$T$ $\text{Ⓢ}$
12.00 $\pm 0.30$	6.50 $\pm 0.10$	$\pm 0.10$	5.30 $\pm 0.10$	$\pm 0.10$	3.80 $\pm 0.10$	$\pm 0.10$	8.00 $\pm 0.10$	5.50 $\pm 0.10$	0.40 $\pm 0.05$
ALTERNATE									

- 1.The Maximum cumulative tolerance is  $\pm 0.2\text{mm}$  for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=53 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SO8OPT-A	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	6.50*5.30*3.80	Customer P/N		SHEET	1/1	PROJ		X $\pm 0.30$ X.XX $\pm 0.10$ X $\pm 5'$	X $\pm 3'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X $\pm 0.20$ X.XXX $\pm 0.05$ .XX $\pm 1'$	
			UNIT	MM	DATE	2023.1.16	APPD			