


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

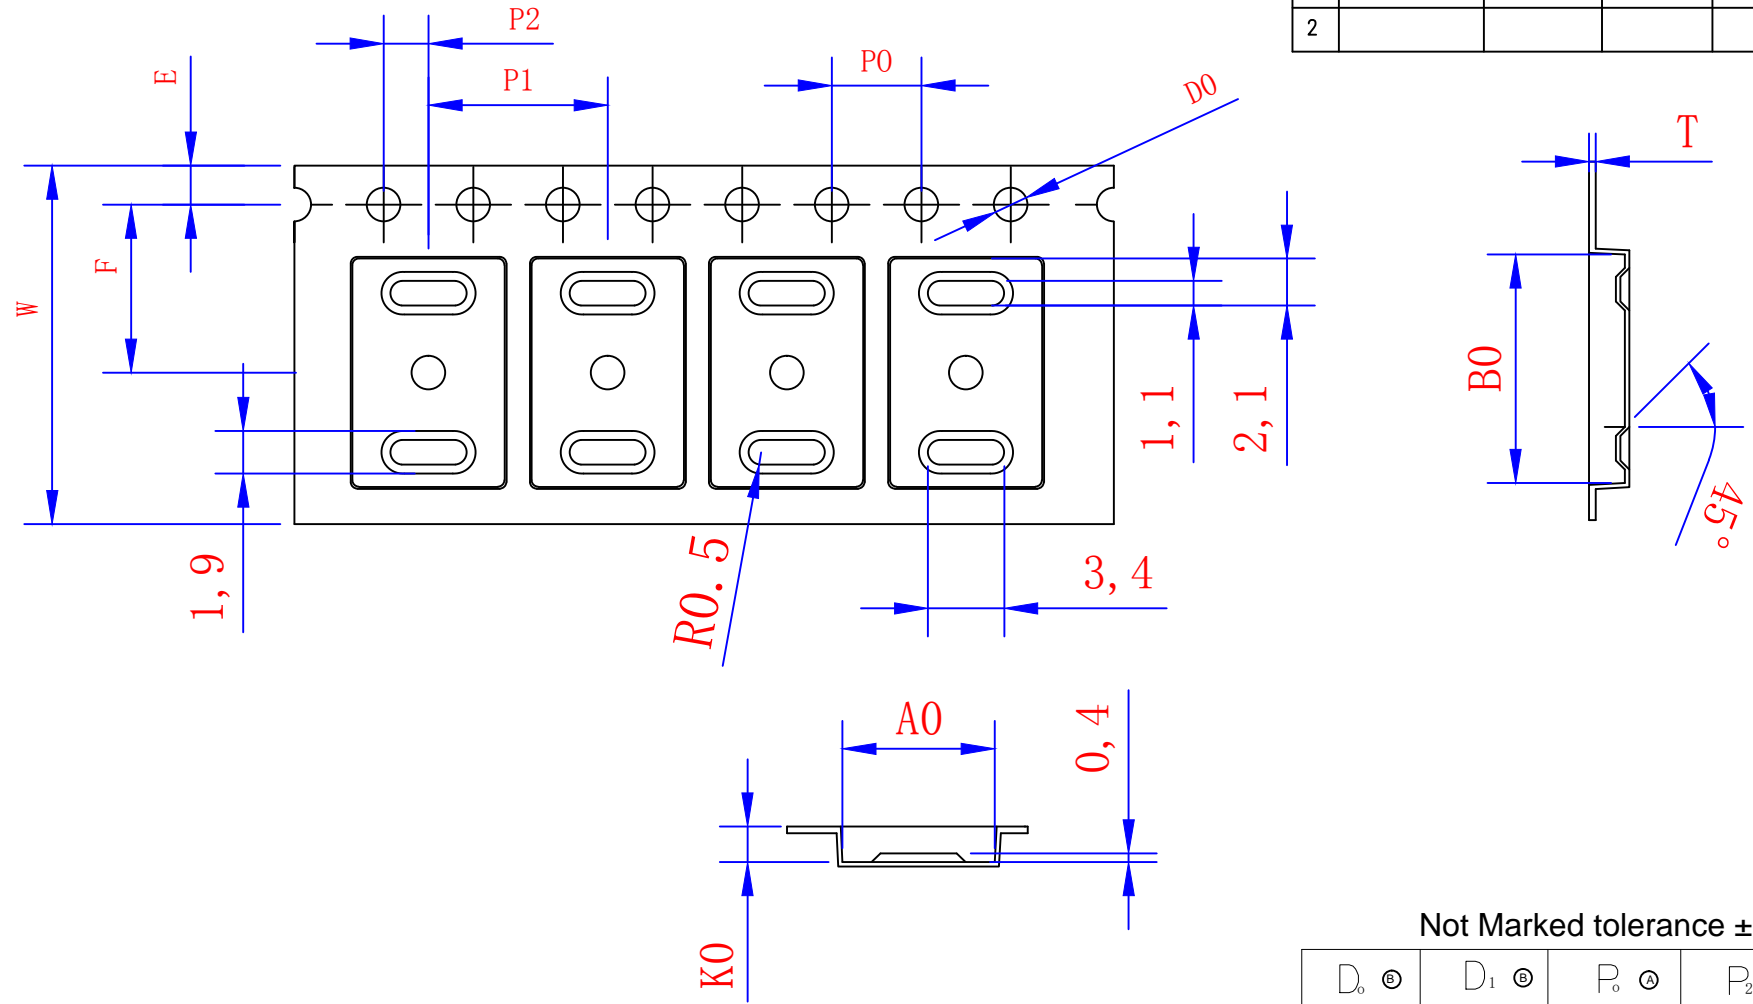

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=100 Meters

Not Marked tolerance $\pm 0.2\text{mm}$

ITEM	W $\text{\textcircled{E}}$	A $\text{\textcircled{A}}$	A $\text{\textcircled{1}}$	B $\text{\textcircled{A}}$	B $\text{\textcircled{1}}$	K $\text{\textcircled{C}}$	K $\text{\textcircled{1}}$	P $\text{\textcircled{A}}$	F $\text{\textcircled{A}}$	T $\text{\textcircled{E}}$
DIM	16.00 ± 0.30	6.80 ± 0.10	± 0.10	10.20 ± 0.10	± 0.10	1.60 ± 0.10	1.20 ± 0.10	8.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	TSSOP28	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	6.80x10.20x1.60	Customer P/N		SHEET	1/1	PROJ		X ± 0.30 X.XX ± 0.10 X $\pm 5'$	X $\pm 3'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20 X.XXX ± 0.05 .XX $\pm 1'$.XX $\pm 1'$
			UNIT	MM	DATE	2022-09-26	APPD			