


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

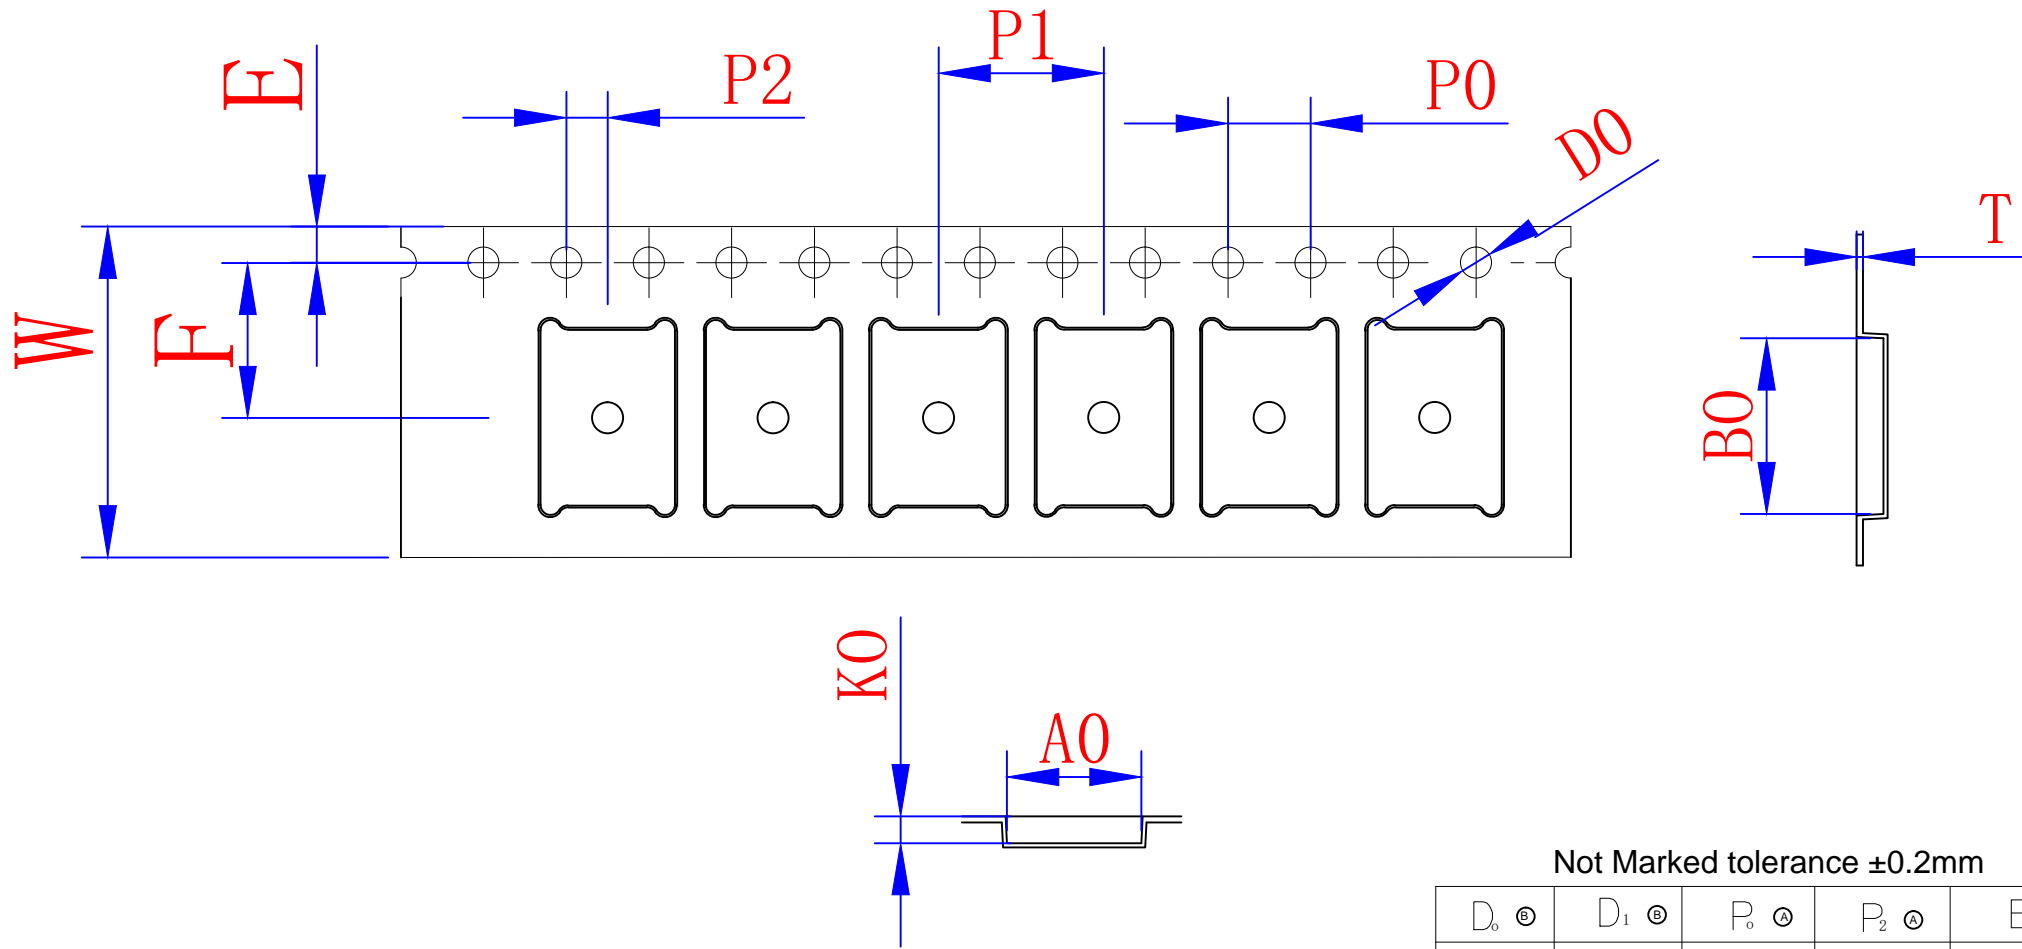

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=133 Meters

Not Marked tolerance $\pm 0.2\text{mm}$

ITEM	W Ⓢ	A Ⓢ	A 1Ⓢ	B Ⓢ	B 1Ⓢ	K Ⓢ	K 1Ⓢ	P 1Ⓢ	F Ⓢ	T Ⓢ
DIM	16.00 ± 0.30	6.50 ± 0.10	± 0.10	8.50 ± 0.10	± 0.10	1.30 ± 0.10	± 0.10	8.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Mold Ref		SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	6.50*8.50*1.30	Customer P/N		SHEET	1/1	PROJ		X ± 0.30 X.XX ± 0.10 X $\pm 5'$	X $\pm 3'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20 X.XXX ± 0.05 .XX $\pm 1'$.XX $\pm 1'$
			UNIT	MM	DATE	2021.9.6	APPD			

