


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

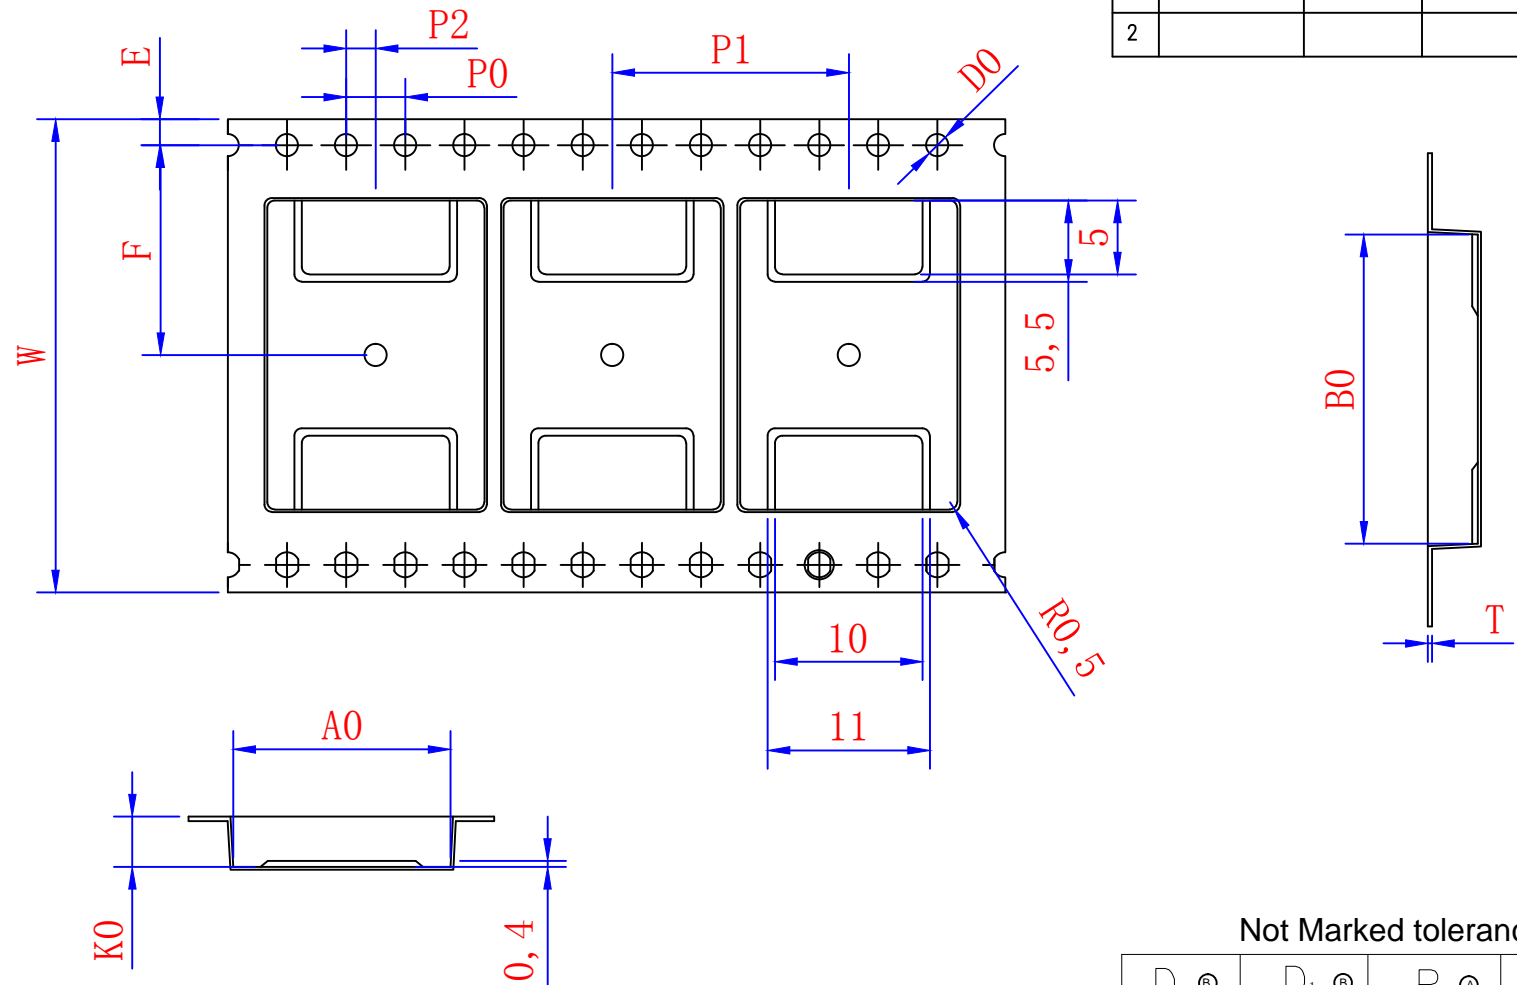

Not Marked tolerance ±0.2mm

D ₀ ⊕	D ₁ ⊕	P ₀ ⊕	P ₂ ⊕	E ⊕						
1.50 ^{+0.10} _{-0.00}	2.00 ^{+0.10} _{-0.00}	4.00 _{±0.10}	2.00 _{±0.10}	1.75 _{±0.10}						
ITEM	W ⊕	A ₀ ⊕	A ₁ ⊕	B ₀ ⊕	B ₁ ⊕	K ₀ ⊕	K ₁ ⊕	P ₁ ⊕	F ⊕	T ⊕
DIM	32.00 _{±0.30}	14.70 _{±0.10}	_{±0.10}	20.90 _{±0.10}	_{±0.10}	3.40 _{±0.10}	3.00 _{±0.10}	16.00 _{±0.10}	14.20 _{±0.10}	0.30 _{±0.05}
ALTERNATE										

- 1.The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=62 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SO32LP-A	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	14.70x20.90x3.40	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X ±5'	X ±3' .XX ±1'
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05 .XX ±1'	
			UNIT	MM	DATE	2023-3-30	APPD			