


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

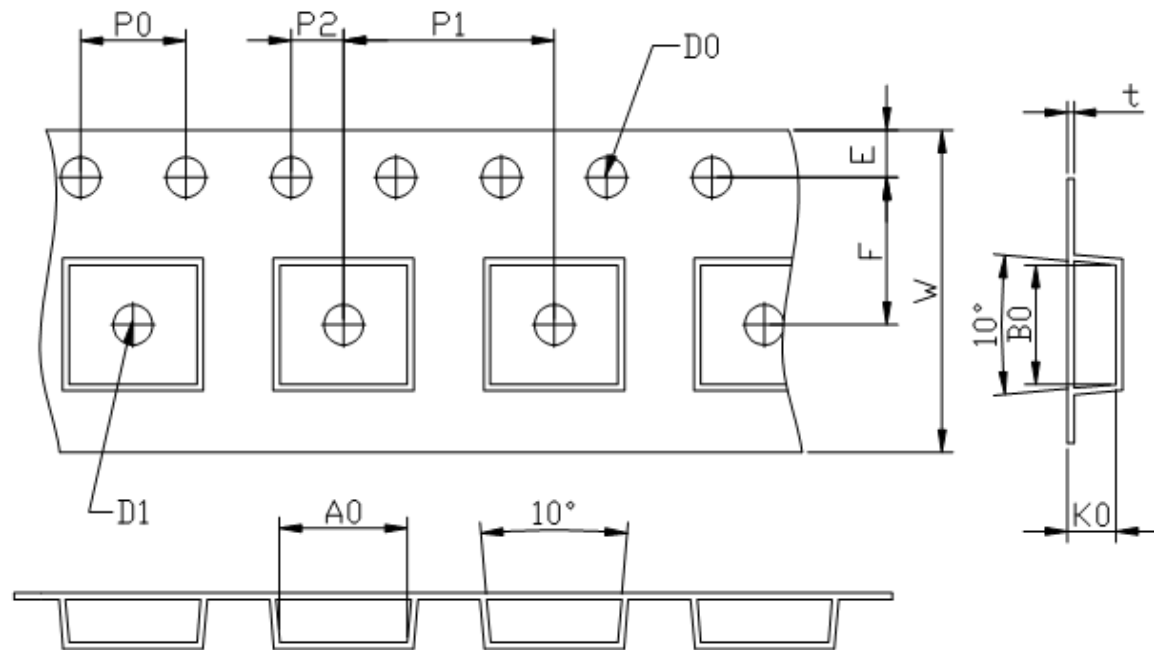

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 Ⓜ	D_1 Ⓜ	P_0 Ⓜ	P_2 Ⓜ	E Ⓜ						
1.55 ± 0.05	below 1.60	4.00 ± 0.10	2.00 ± 0.05	1.75 ± 0.10						
ITEM	W Ⓜ	A_0 Ⓜ	A_1 Ⓜ	B_0 Ⓜ	B_1 Ⓜ	K_0 Ⓜ	K_1 Ⓜ	P_1 Ⓜ	F Ⓜ	T Ⓜ
DIM	12.00 ± 0.10	4.85 ± 0.10	± 0.10	4.50 ± 0.10	± 0.10	1.75 ± 0.10	± 0.10	8.00 ± 0.10	5.50 ± 0.05	0.23 ± 0.05
ALTERNATE										

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PC+S black conductive
- 5.One 22" Reel=500 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SOT-89	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	4.85*4.50*1.75	Customer P/N		SHEET	1/1	PROJ		X ± 0.30 X.XX ± 0.10 X $\pm 5'$	X $\pm 3'$
	MATERIAL	PC+S black conductive	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20 X.XXX ± 0.05 .XX $\pm 1'$.XX $\pm 1'$
			UNIT	MM	DATE		APPD			

