


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

| REV. | MODIFICATION | DATE | DRAWING | CHECKED | APPROVED |
|------|--------------|------|---------|---------|----------|
| 1    |              |      |         |         |          |
| 2    |              |      |         |         |          |

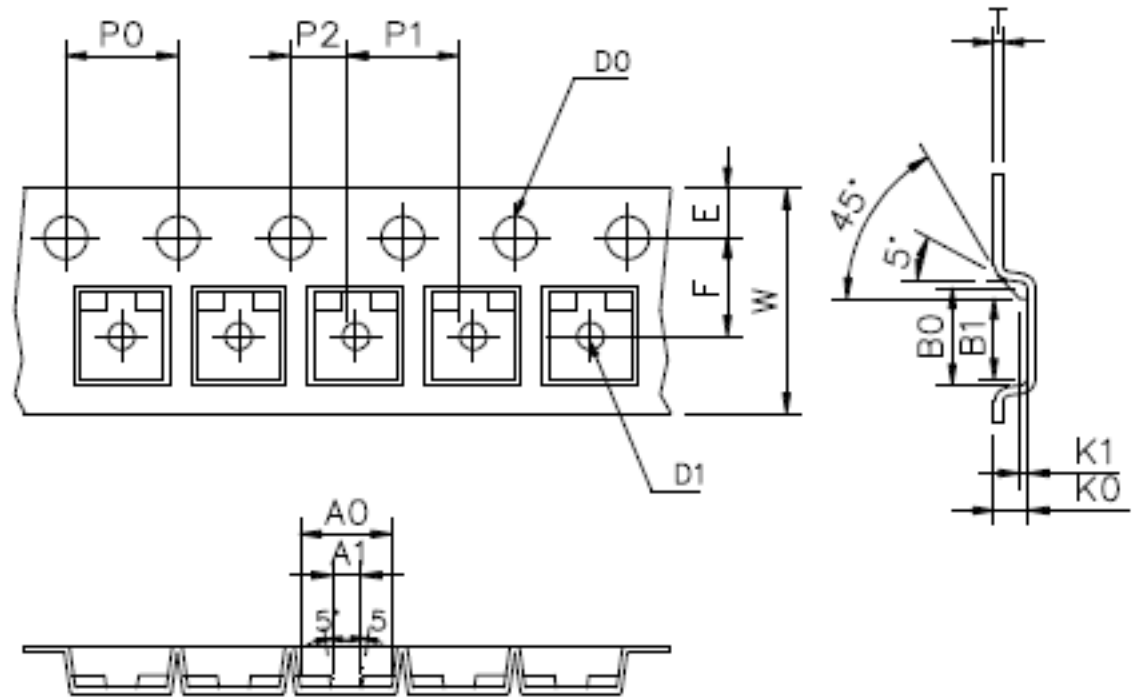

Not Marked tolerance  $\pm 0.2\text{mm}$

| $D_0$ $\text{\textcircled{E}}$ | $D_1$ $\text{\textcircled{E}}$ | $P_0$ $\text{\textcircled{A}}$ | $P_2$ $\text{\textcircled{A}}$ | $E$ $\text{\textcircled{A}}$   |                                |                                |                                |                                |                              |                              |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|------------------------------|------------------------------|
| 1.55 $\pm 0.05$                | below 1.20                     | 4.00 $\pm 0.10$                | 2.00 $\pm 0.05$                | 1.75 $\pm 0.10$                |                                |                                |                                |                                |                              |                              |
| ITEM                           | $W$ $\text{\textcircled{E}}$   | $A_0$ $\text{\textcircled{A}}$ | $A_1$ $\text{\textcircled{A}}$ | $B_0$ $\text{\textcircled{A}}$ | $B_1$ $\text{\textcircled{A}}$ | $K_0$ $\text{\textcircled{C}}$ | $K_1$ $\text{\textcircled{C}}$ | $P_1$ $\text{\textcircled{A}}$ | $F$ $\text{\textcircled{A}}$ | $T$ $\text{\textcircled{E}}$ |
| DIM                            | 8.00 $\pm 0.10$                | 3.10 $\pm 0.10$                | 3.10 $\pm 0.10$                | 3.35 $\pm 0.10$                | 2.64 $\pm 0.10$                | 1.30 $\pm 0.10$                | 0.40 $\pm 0.10$                | 4.00 $\pm 0.10$                | 3.50 $\pm 0.05$              | 0.22 $\pm 0.05$              |
| ALTERNATE                      |                                |                                |                                |                                |                                |                                |                                |                                |                              |                              |

- The Maximum cumulative tolerance is  $\pm 0.2\text{mm}$  for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PC+S black conductive
- One 22" Reel=1000 Meters

|                 |          |                       |              |          |       |     |      |  |  |             |
|-----------------|----------|-----------------------|--------------|----------|-------|-----|------|--|--|-------------|
| RoHS Compliance | NAME.    | CARRIER TAPE          | Part Number  | SOT-23-4 | SIZE  | A4  | DSGD |  | DIM TOL                                      | Ang Tol     |
|                 | Mold Ref | 3.10*3.35*1.30        | Customer P/N |          | SHEET | 1/1 | PROJ |  | X $\pm 0.30$ X.XX $\pm 0.10$ X $\pm 5'$      | .X $\pm 3'$ |
|                 | MATERIAL | PC+S black conductive | SCALE        | 1:1      | REV   | A/0 | CHKD |  | X.X $\pm 0.20$ X.XXX $\pm 0.05$ .XX $\pm 1'$ |             |
|                 |          |                       | UNIT         | MM       | DATE  |     | APPD |  |  |             |

