


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

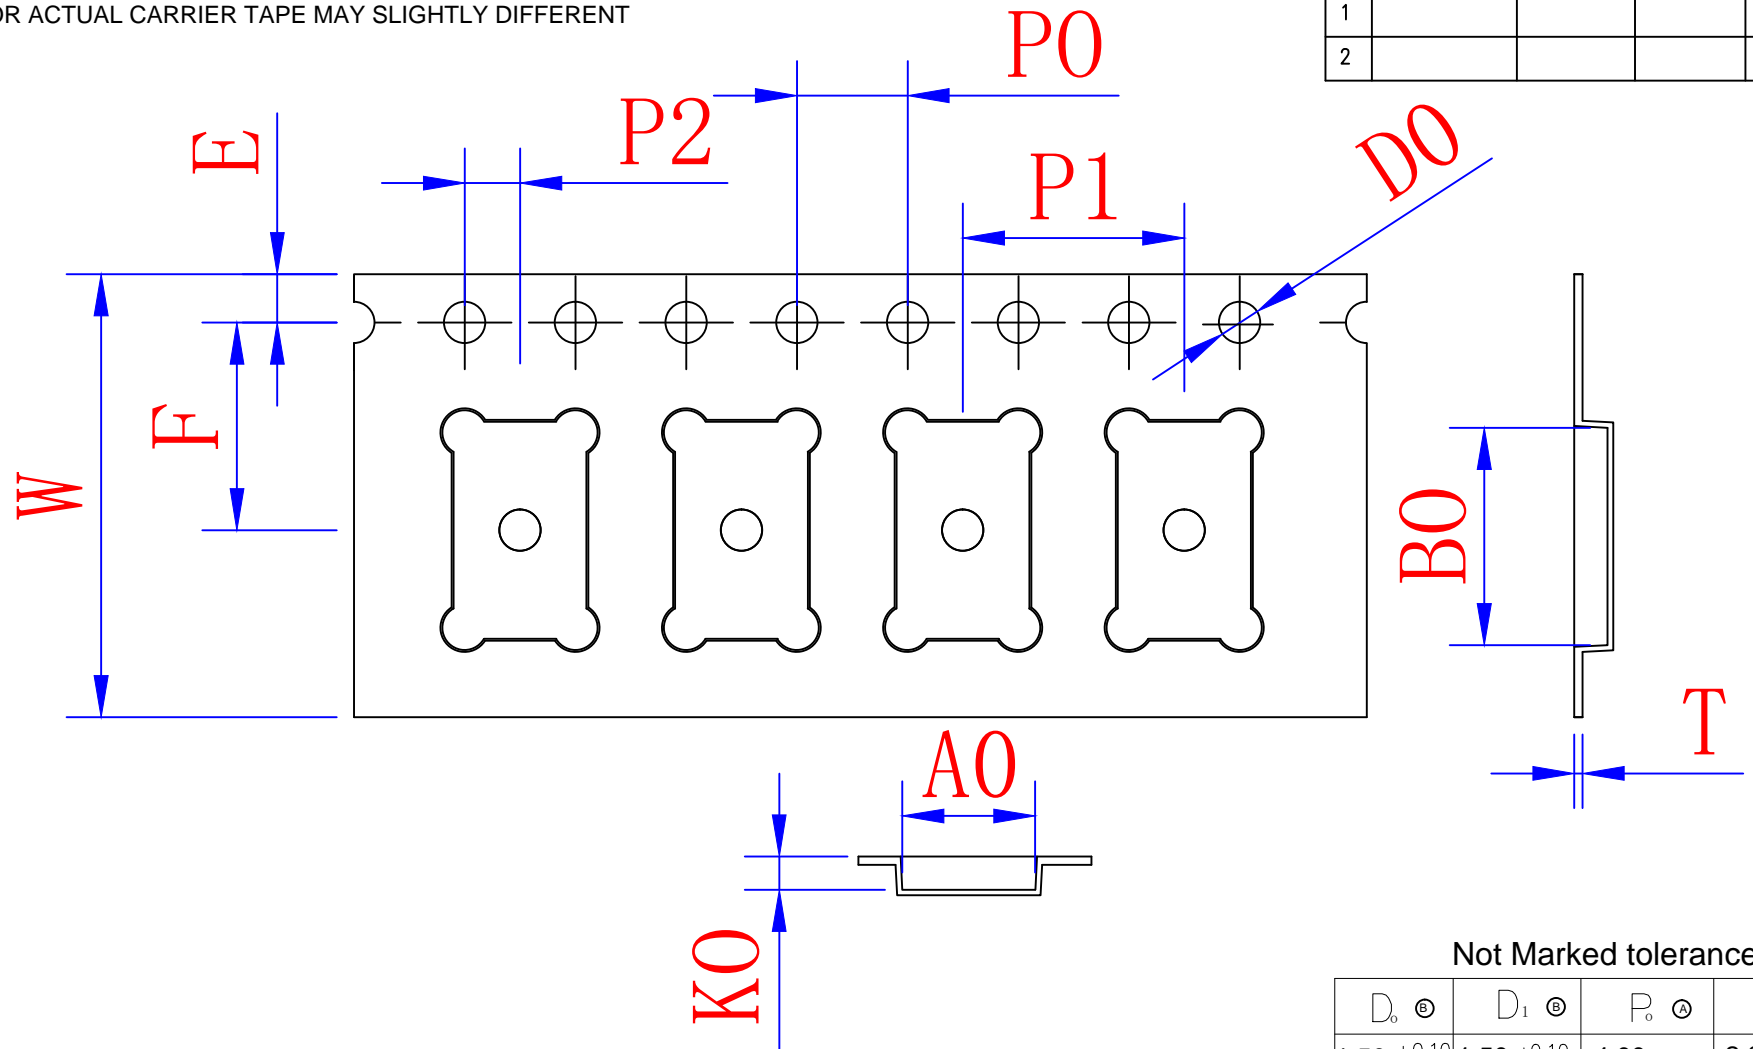

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=133 Meters

Not Marked tolerance $\pm 0.2\text{mm}$

ITEM	W_{E}	A_{A}	A_{I}	B_{A}	B_{I}	K_{C}	K_{I}	P_{I}	F_{A}	T_{E}
DIM	16.00 ± 0.30	4.80 ± 0.10	± 0.10	7.85 ± 0.10	± 0.10	1.20 ± 0.10	± 0.10	8.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	QFN-4.5x7.5	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	4.80x7.85x1.20	Customer P/N		SHEET	1/1	PROJ		X ± 0.30	X.XX ± 0.10
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20	X.XX ± 0.05
			UNIT	MM	DATE	2022-03-29	APPD			

