


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

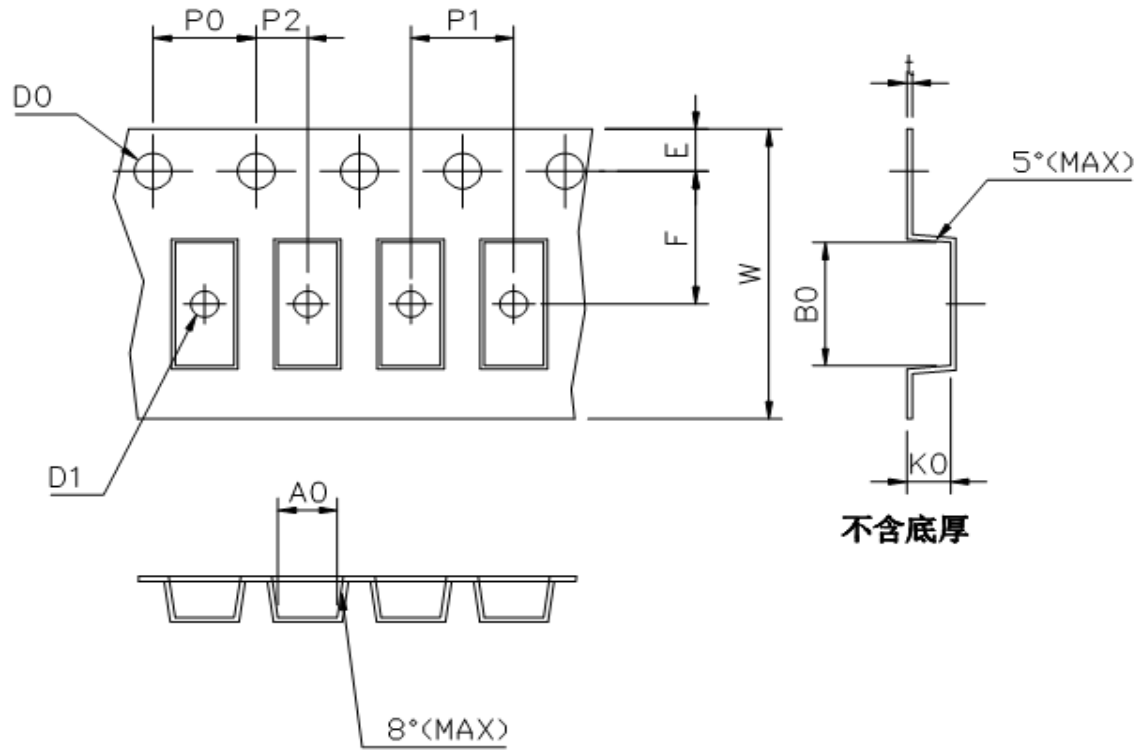

Not Marked tolerance ±0.2mm

$D_0$ Ⓞ	$D_1$ Ⓞ	$P_0$ Ⓞ	$P_2$ Ⓞ	$E$ Ⓞ						
1.55 ±0.05	below 1.60	4.00 ±0.10	2.00 ±0.05	1.75 ±0.10						
ITEM	$W$ Ⓞ	$A_0$ Ⓞ	$A_1$ Ⓞ	$B_0$ Ⓞ	$B_1$ Ⓞ	$K_0$ Ⓞ	$K_1$ Ⓞ	$P_1$ Ⓞ	$F$ Ⓞ	$T$ Ⓞ
DIM	12.00 ±0.10	2.30 ±0.10	±0.10	5.00 ±0.10	±0.10	1.45 ±0.10	±0.10	4.00 ±0.10	5.50 ±0.05	0.23 ±0.05
ALTERNATE										

- The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PC+S black conductive
- One 22" Reel=800 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Mold Ref	H-12-2	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	2.30*5.00*1.45	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X ±5'	X ±3'
	MATERIAL	PC+S black conductive	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05 .XX ±1'	
			UNIT	MM	DATE		APPD			

