


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

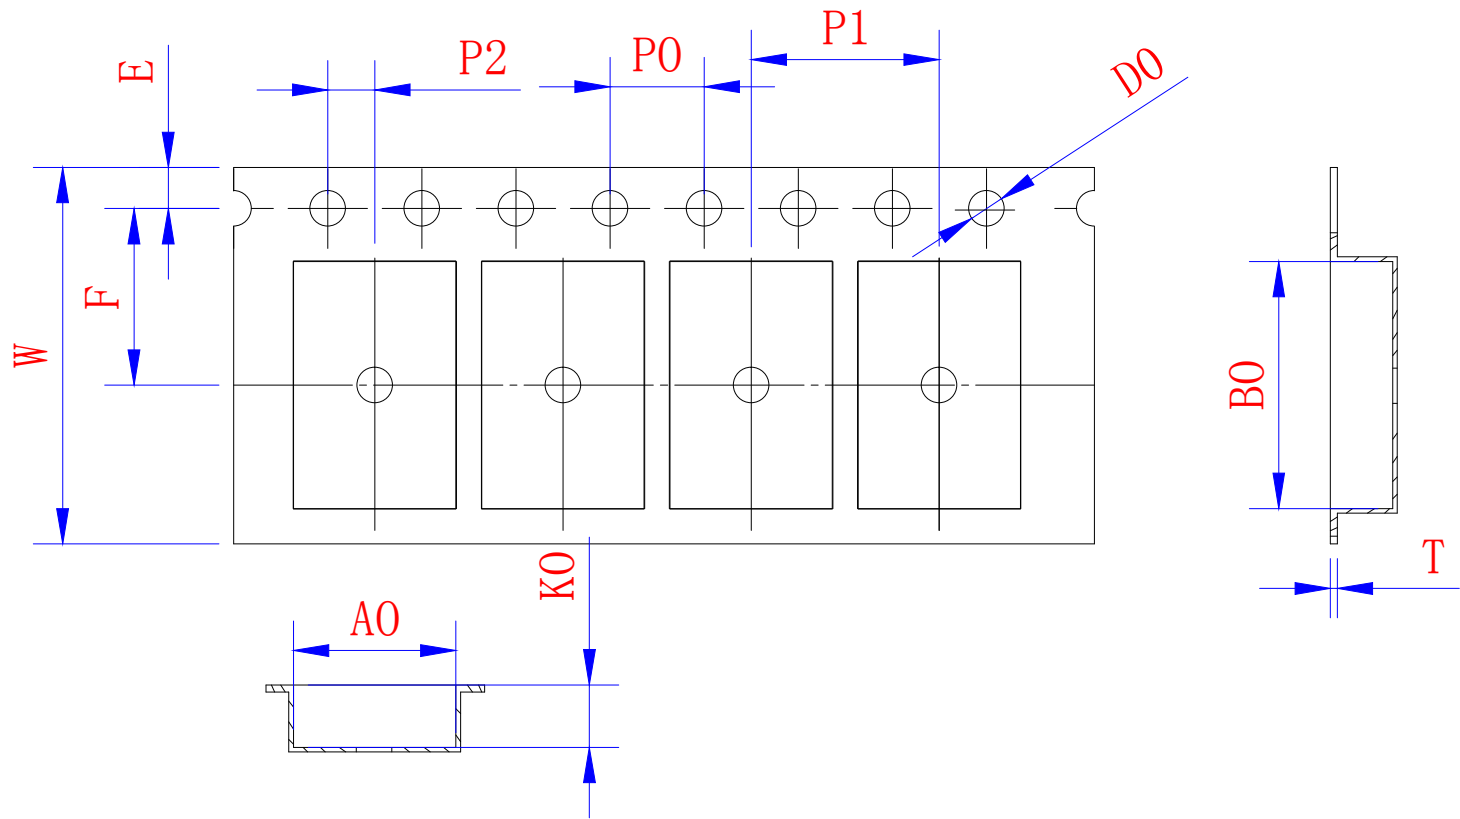

Not Marked tolerance ±0.2mm

- 1.The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=70 Meters

D ₀ ⊕	D ₁ ⊕	P ₀ ⊕	P ₂ ⊕	E ⊕						
1.50 ^{+0.10} _{-0.00}	1.50 ^{+0.10} _{-0.00}	4.00 ^{±0.10}	2.00 ^{±0.10}	1.75 ^{±0.10}						
ITEM	W ⊕	A ₀ ⊕	A ₁ ⊕	B ₀ ⊕	B ₁ ⊕	K ₀ ⊕	K ₁ ⊕	P ₁ ⊕	F ⊕	T ⊕
DIM	16.00 ^{±0.30}	6.90 ^{±0.10}	^{±0.10}	10.50 ^{±0.10}	^{±0.10}	2.65 ^{±0.10}	^{±0.10}	8.00 ^{±0.10}	7.50 ^{±0.10}	0.30 ^{±0.05}
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	DPAKT4	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	6.90*10.50*2.65	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X.XX ±0.05	X ±5° X.XX ±3° .XX ±1°
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05	
			UNIT	MM	DATE	2021.6.8	APPD			