


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

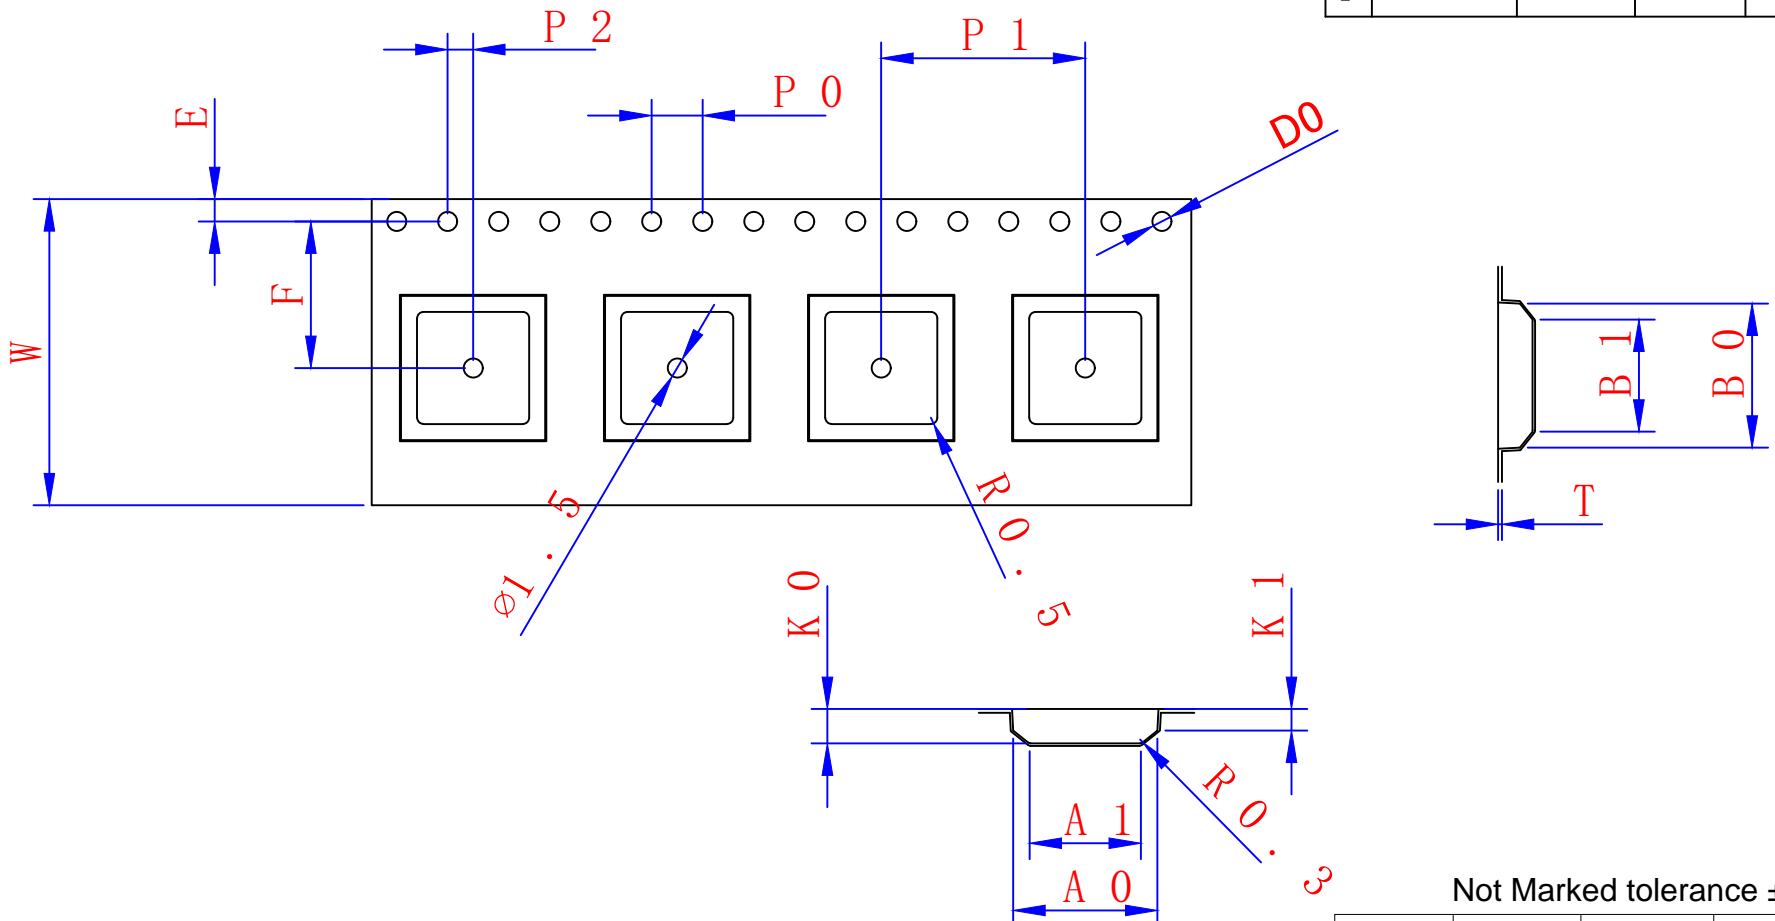

Not Marked tolerance ±0.2mm

	D ₀ ⊕	D ₁ ⊕	P ₀ ⊕	P ₂ ⊕	E ⊕					
	1.50 ^{+0.10} _{-0.00}	1.50 ^{+0.10} _{-0.00}	4.00 _{±0.10}	2.00 _{±0.10}	1.75 _{±0.10}					
ITEM	W ⊕	A ₀ ⊕	A ₁ ⊕	B ₀ ⊕	B ₁ ⊕	K ₀ ⊕	K ₁ ⊕	P ₁ ⊕	F ⊕	T ⊕
DIM	24.00 _{±0.30}	11.30 _{±0.10}	8.80 _{±0.10}	11.30 _{±0.10}	8.80 _{±0.10}	2.70 _{±0.10}	1.70 _{±0.10}	16.00 _{±0.10}	11.50 _{±0.10}	0.30 _{±0.05}
ALTERNATE										

- 1.The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=83 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	BGA1111B	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	11.30*11.30*2.70	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X.XX ±0.05	X ±5' X ±3' X ±1'
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05	.XX ±1'
			UNIT	MM	DATE	2019.11.26	APPD			

SINHO ELECTRONIC TECHNOLOGY CO.,LTD

