


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

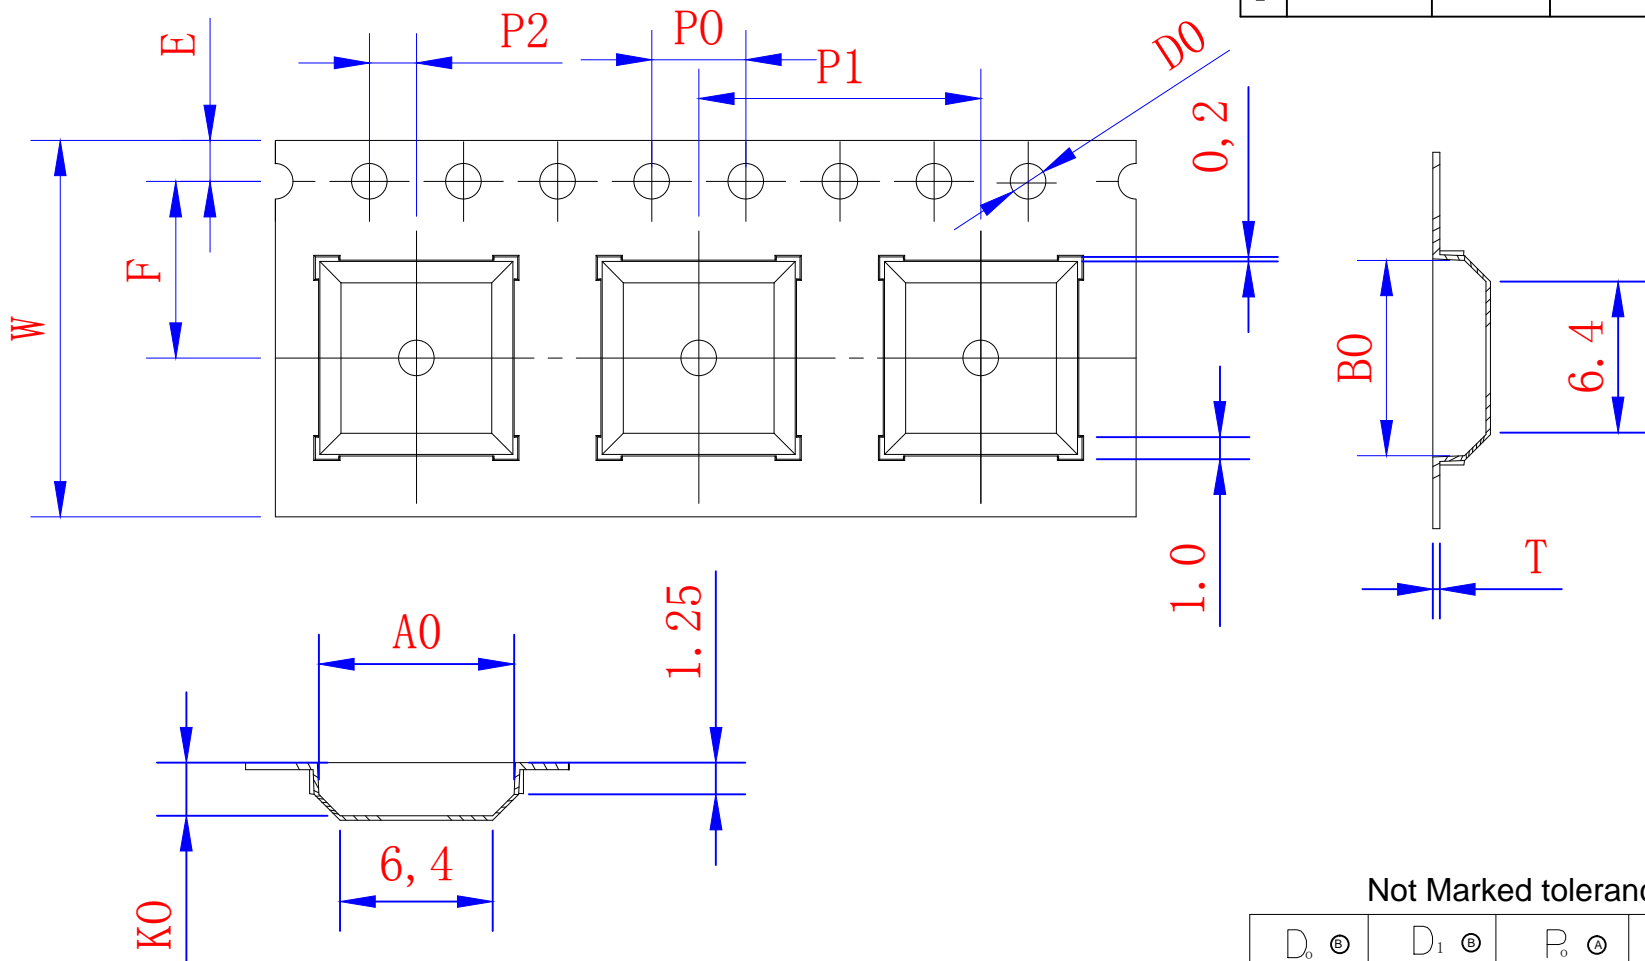

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=87 Meters

Not Marked tolerance $\pm 0.2\text{mm}$

ITEM	W $\text{\textcircled{E}}$	A ₀ $\text{\textcircled{A}}$	A ₁ $\text{\textcircled{A}}$	B ₀ $\text{\textcircled{A}}$	B ₁ $\text{\textcircled{A}}$	K ₀ $\text{\textcircled{C}}$	K ₁ $\text{\textcircled{C}}$	P ₁ $\text{\textcircled{A}}$	F $\text{\textcircled{A}}$	T $\text{\textcircled{E}}$
DIM	16.00 ± 0.30	8.30 ± 0.10	± 0.10	8.30 ± 0.10	± 0.10	2.25 ± 0.10	± 0.10	12.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Mold Ref	BGA0808K	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	8.30*8.30*2.25	Customer P/N		SHEET	1/1	PROJ		X ± 0.30	X.XX ± 0.10
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20	X.XXX ± 0.05
			UNIT	MM	DATE	2021.7.30	APPD			

