


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

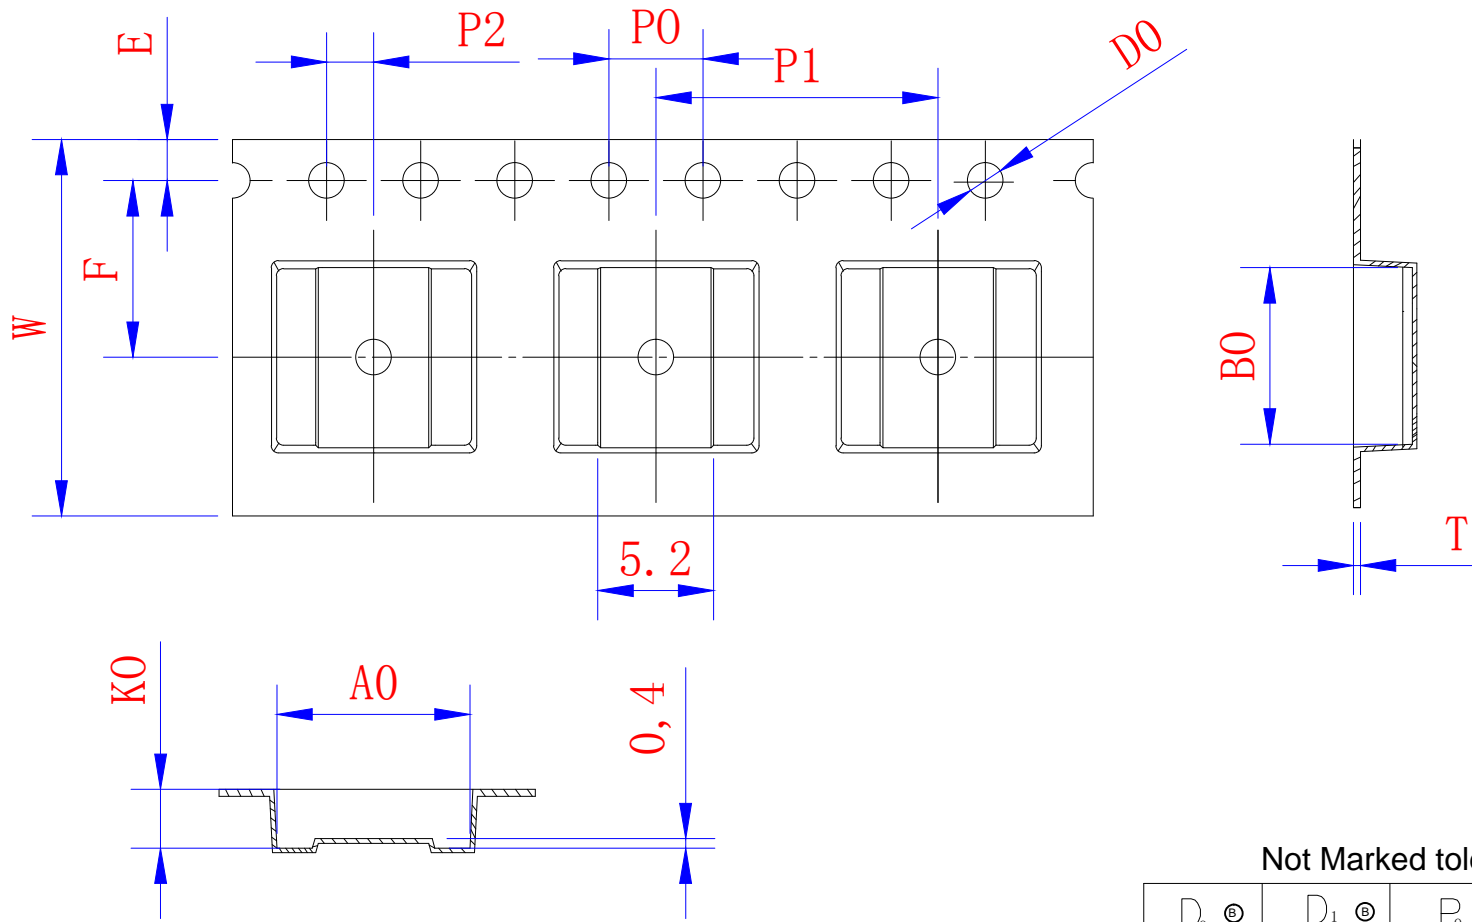

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 E	D_1 E	P_0 A	P_2 A	E A						
1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	4.00 ± 0.10	2.00 ± 0.10	1.75 ± 0.10						
K_0 C	K_1 C	P_1 A	F A	T E						
2.50 ± 0.10	2.10 ± 0.10	12.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05						
ITEM	W E	A_0 A	A_1 A	B_0 A	B_1 A	K_0 C	K_1 C	P_1 A	F A	T E
DIM	16.00 ± 0.30	8.20 ± 0.10	± 0.10	7.50 ± 0.10	± 0.10	2.50 ± 0.10	2.10 ± 0.10	12.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

- The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PS black
- One 22" Reel=79 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SSOP20-2	SIZE	A4	DSGD		DIM TOL	Ang Tol	
	Mold Ref	8.20*7.50*2.50	Customer P/N		SHEET	1/1	PROJ		X ± 0.30	X.XX ± 0.10	X $\pm 5'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20	X.XX ± 0.05	.XX $\pm 3'$
			UNIT	MM	DATE	2021.6.8	APPD				