


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

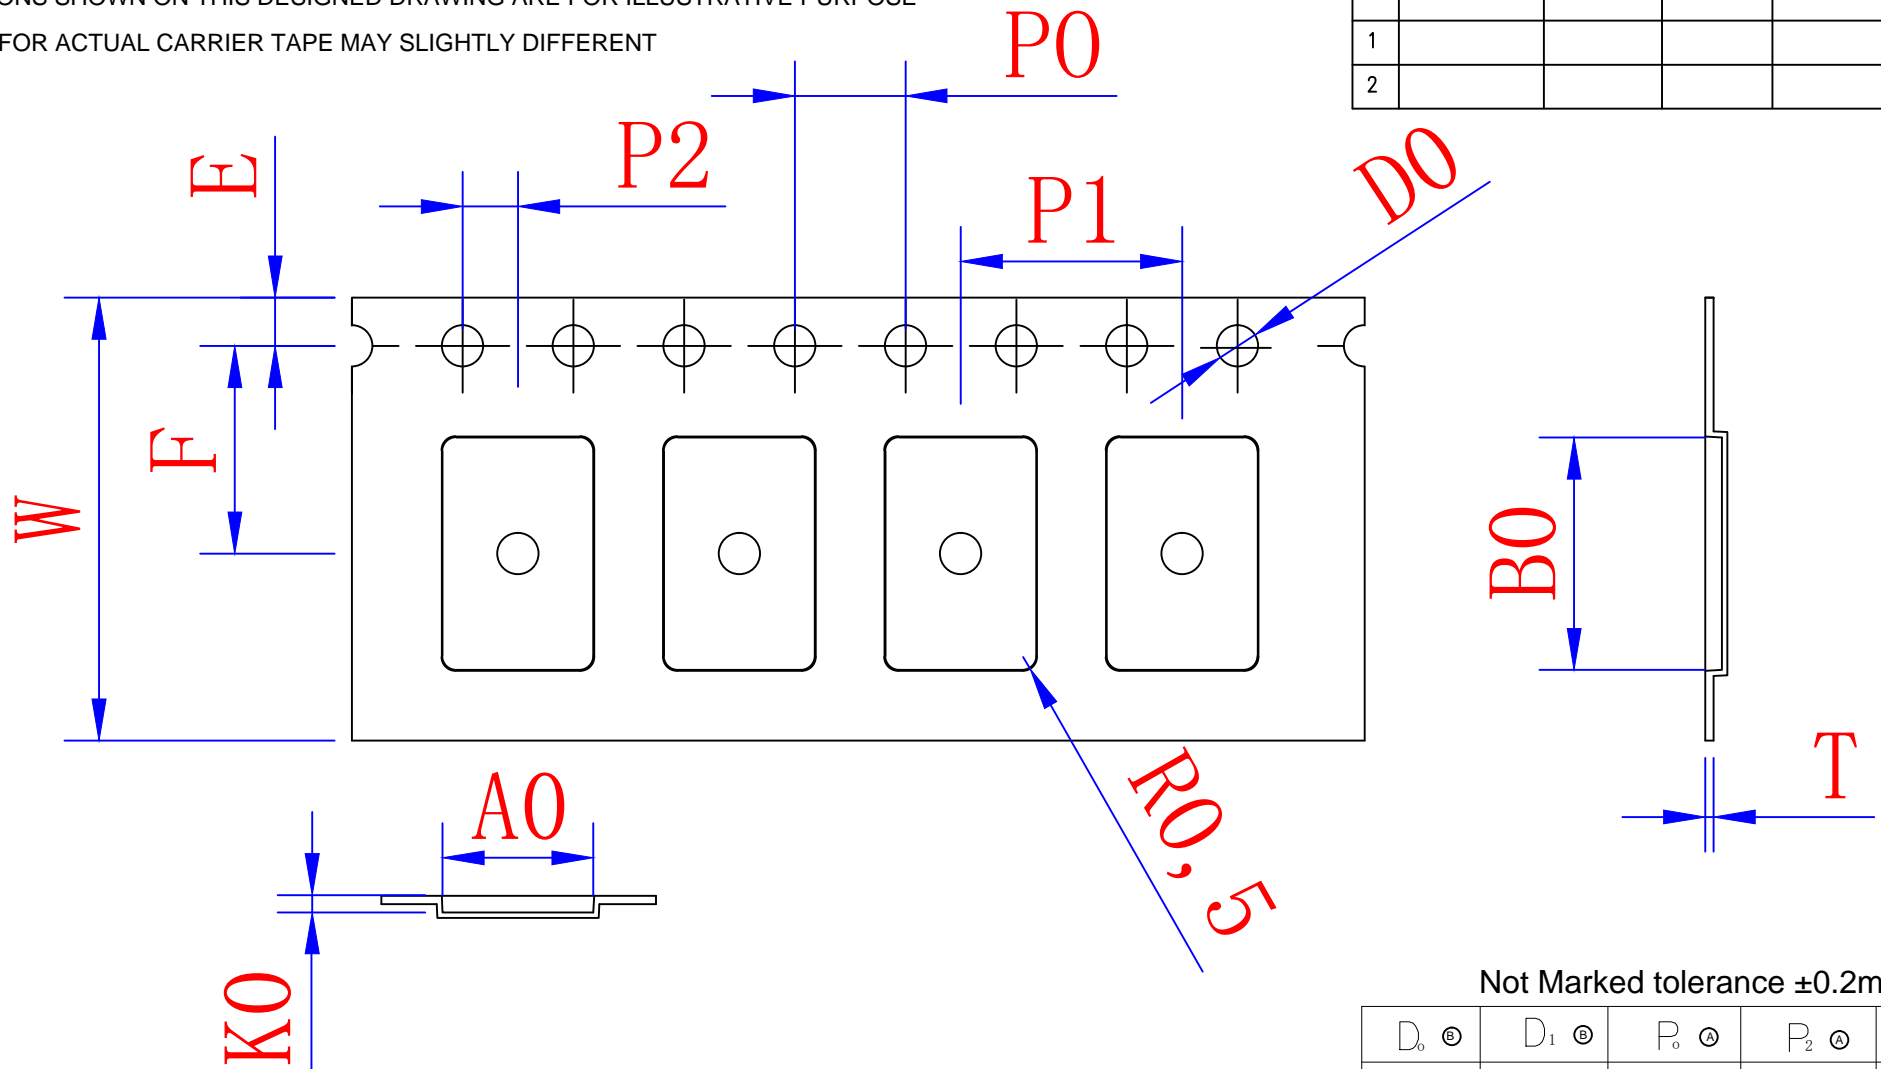

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=235 Meters

Not Marked tolerance $\pm 0.2\text{mm}$

ITEM	W [Ⓔ]	A ₀ [Ⓐ]	A ₁ [Ⓐ]	B ₀ [Ⓐ]	B ₁ [Ⓐ]	K ₀ [Ⓒ]	K ₁ [Ⓒ]	P ₁ [Ⓐ]	F [Ⓐ]	T [Ⓔ]
DIM	16.00 ± 0.30	5.45 ± 0.10	± 0.10	8.40 ± 0.10	± 0.10	0.60 ± 0.10	± 0.10	8.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

D ₀ [Ⓔ]	D ₁ [Ⓔ]	P ₀ [Ⓐ]	P ₂ [Ⓐ]	E [Ⓐ]
1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	4.00 ± 0.10	2.00 ± 0.10	1.75 ± 0.10

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	BD0515X0800	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	5.45x8.40x0.60	Customer P/N		SHEET	1/1	PROJ		X ± 0.30	X.XX ± 0.10
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20	X.XX ± 0.05
			UNIT	MM	DATE	2022-04-28	APPD			

