


RoHS Compliance

6	7	8			
REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED

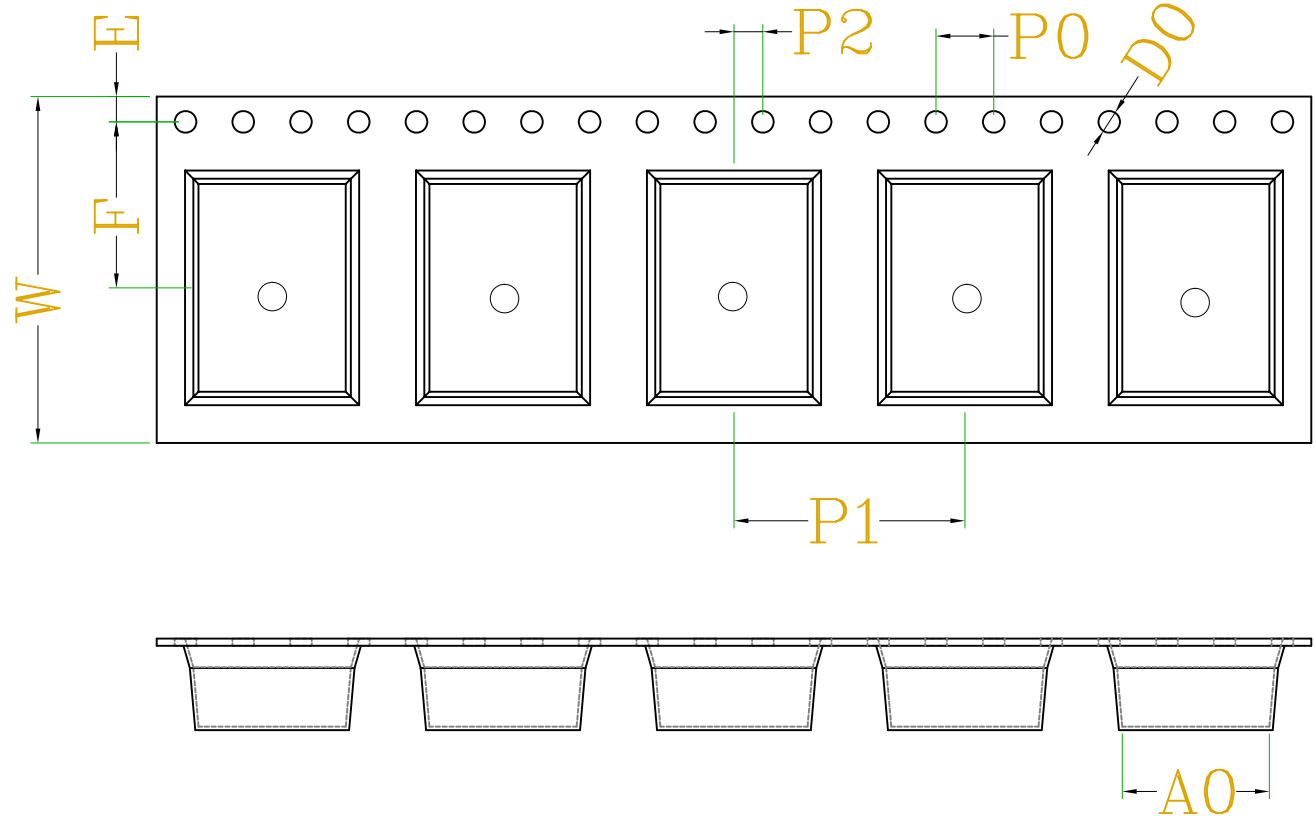

Not Marked tolerance ±0.2mm

D <sub>0</sub> ⊕	D <sub>1</sub> ⊕	P <sub>0</sub> ⊕	P <sub>2</sub> ⊕	E ⊕
1.50 <sup>+0.10</sup> / <sub>-0.10</sub>	0.00 <sup>+0.10</sup> / <sub>-0.10</sub>	4.00 <sup>+0.10</sup> / <sub>-0.10</sub>	2.00 <sup>+0.10</sup> / <sub>-0.10</sub>	1.75 <sup>+0.10</sup> / <sub>-0.10</sub>

- The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-2A Series definition
- Material: PS black
- One 22" Reel=30 Meters

ITEM	W ⊕	A <sub>0</sub> ⊕	A <sub>1</sub> ⊕	B <sub>0</sub> ⊕	B <sub>1</sub> ⊕	K <sub>0</sub> ⊕	K <sub>1</sub> ⊕	P <sub>1</sub> ⊕	F ⊕	T ⊕
DIM	24.0 <sup>+0.30</sup> / <sub>-0.30</sub>	10.2 <sup>+0.10</sup> / <sub>-0.10</sub>	0.0 <sup>+0.10</sup> / <sub>-0.10</sub>	14.4 <sup>+0.10</sup> / <sub>-0.10</sub>	0.00 <sup>+0.10</sup> / <sub>-0.10</sub>	5.00 <sup>+0.10</sup> / <sub>-0.10</sub>	0.00 <sup>+0.10</sup> / <sub>-0.10</sub>	16.0 <sup>+0.10</sup> / <sub>-0.10</sub>	11.5 <sup>+0.10</sup> / <sub>-0.10</sub>	0.40 <sup>+0.05</sup> / <sub>-0.05</sub>
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	FOXFSO-A	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	10.20*14.40*5.00	Customer P/N		SHEET	1/1	PROJ		X ±0.30	X.XX ±0.10
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20	X.XXX ±0.05
			UNIT	MM	DATE	2022.01.17	APPD			

