


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

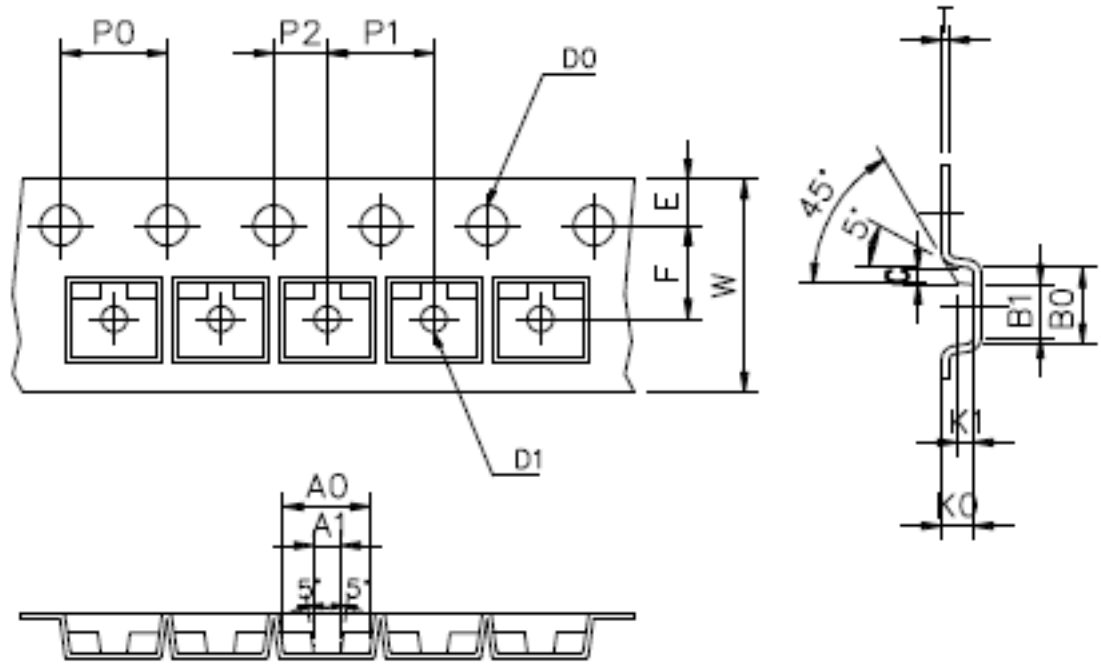

REMARK: C DIMENSION (0.55 ± 0.05)

Not Marked tolerance ±0.2mm

- 1.The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PC+S black conductive
- 5.One 22" Reel=1,000 Meters

	D ₀ ⊕	D ₁ ⊕	P ₀ ⊕	P ₁ ⊕	E ⊕					
	1.55 ±0.05	below 1.20	4.00 ±0.10	2.00 ±0.05	1.75 ±0.10					
ITEM	W ⊕	A ₀ ⊕	A ₁ ⊕	B ₀ ⊕	B ₁ ⊕	K ₀ ⊕	K ₁ ⊕	P ₁ ⊕	F ⊕	T ⊕
DIM	8.00 ±0.10	3.20 ±0.10	1.15 ±0.10	2.95 ±0.10	2.20 ±0.10	1.25 ±0.10	0.85 ±0.10	4.00 ±0.10	3.50 ±0.05	0.22 ±0.05
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	PN	SOT-23-3	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	3.20*2.95*1.25	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X ±5'	X ±3'
	MATERIAL	PC+S black conductive	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05 .XX ±1'	
			UNIT	MM	DATE		APPD			

