


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

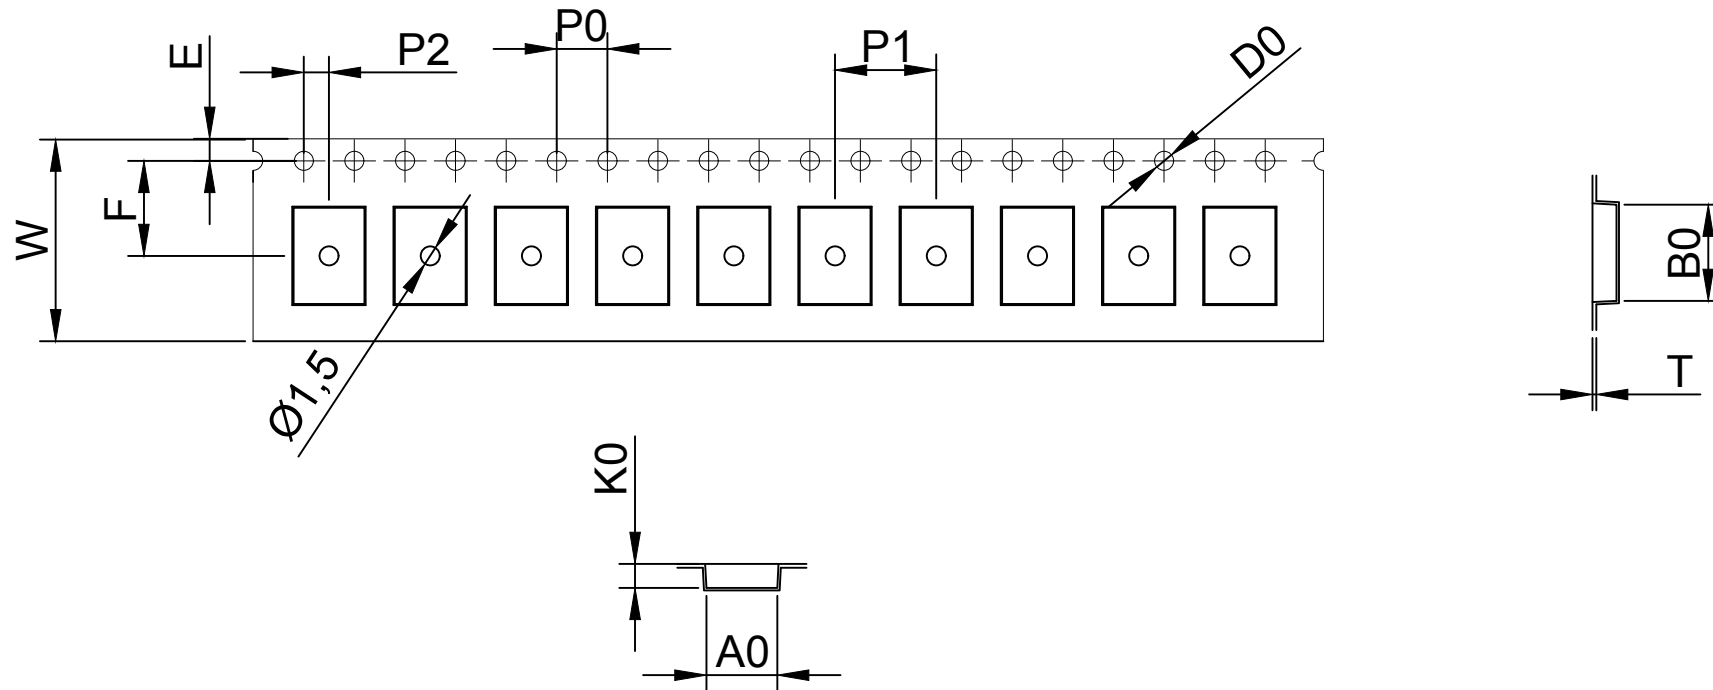

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 Ⓜ	D_1 Ⓜ	P_0 Ⓜ	P_2 Ⓜ	E Ⓜ						
$1.50^{+0.10}_{-0.00}$	$1.50^{+0.10}_{-0.00}$	$4.00_{\pm 0.10}$	$2.00_{\pm 0.10}$	$1.75_{\pm 0.10}$						
ITEM	W Ⓜ	A_0 Ⓜ	A_1 Ⓜ	B_0 Ⓜ	B_1 Ⓜ	K_0 Ⓜ	K_1 Ⓜ	P_1 Ⓜ	F Ⓜ	T Ⓜ
DIM	$16.00_{\pm 0.30}$	$5.60_{\pm 0.10}$	± 0.10	$7.60_{\pm 0.10}$	± 0.10	$1.90_{\pm 0.10}$	± 0.10	$8.00_{\pm 0.10}$	$7.50_{\pm 0.10}$	$0.30_{\pm 0.05}$
ALTERNATE										

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=99 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	87011A-B	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	5.60*7.60*1.90	Customer P/N		SHEET	1/1	PROJ		$X_{\pm 0.30}$	$X.XX_{\pm 0.10}$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		$X.X_{\pm 0.20}$	$X.XXX_{\pm 0.05}$
			UNIT	MM	DATE	2022.01.17	APPD			

