

SPECIAL PROTECTIVE BANDS

Designed perforated—READY TO SNAP AND USE!


Easy to use ✓ (perforated the material every 1.09M long for 13” reels)

Fast to use ✓ (just snap to use)

Take less space ✓ (supplied on 15” diameter reels)

Work easier ✓ (keep reel bands by your workstation)

Perfect withstand ✓ (wider 0.3mm than carrier tape widths)

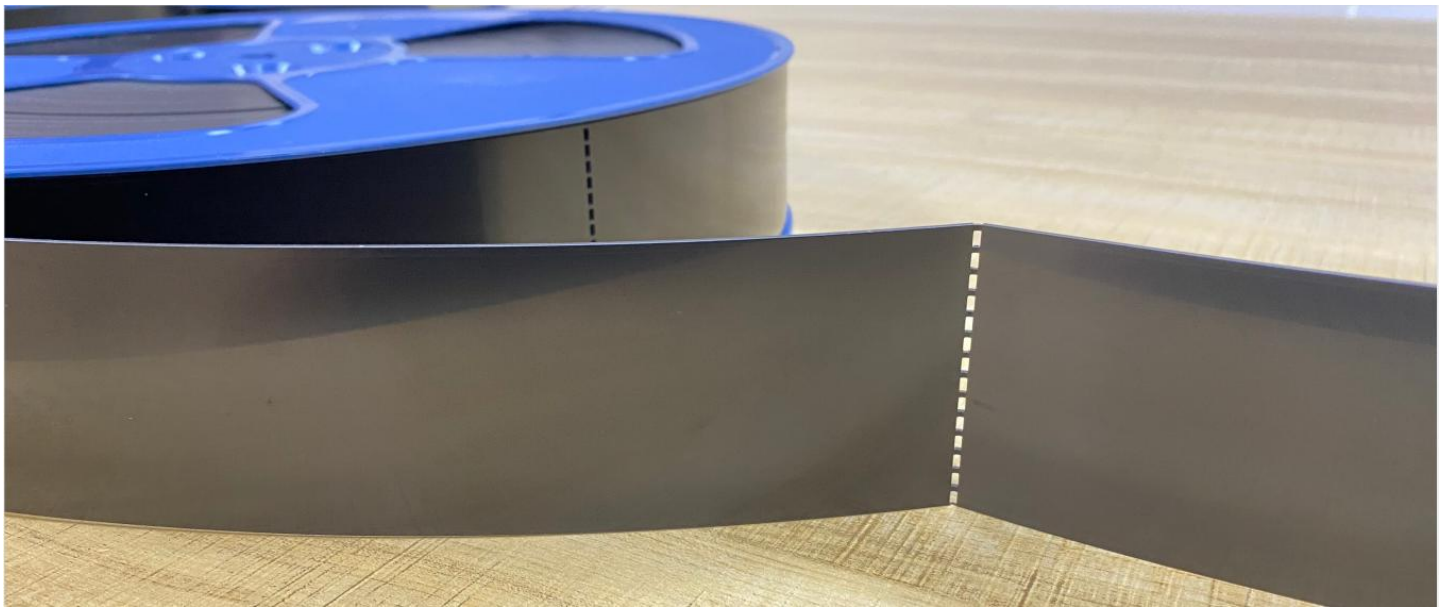

Sinho’s SPECIAL PERFORATED SNAP REEL BANDS provide additional protection for components that are packaged in tape and reel. Sinho REEL BANDS are designed to wrap around the outer layer of carrier tape to resist the compressive forces that carrier tape alone can’t withstand. The materials was perforated in every 1.09M long for 13” reels, every 1.25M long for 15” reels. All Reel Bands are composed of conductive polystyrene materials.

CLICK <https://youtu.be/BltllyrCMI8> to see ready snap and use right now!

Request a quote ! info@xmsinho.com

MATERIAL PHYSICAL PROPERTIES

Physical Properties	Test method	Unit	Value
Specific Gravity	ASTM D-792	g/cm ³	1.06
Mechanical Properties	Test method	Unit	Value

Tensile Strength @Yield	ISO527	Mpa	22.3
Tensile Sterngth @Break	ISO527	Mpa	19.2
Tensile Elongation @Break	ISO527	%	24
Electrical Properties	Test method	Unit	Value
Surface Resistance	ASTM D-257	Ohm/sq	10 ⁴⁻⁶
Thermal Properties	Test method	Unit	Value
Heat distortion temperature	ASTM D-648	°C	62
Molding Shrinkage	ASTM D-955	%	0.00725

Recommended Storage Conditions:

- 1) Storage Temperature: 0~ 40°C
- 2) Relative humidity: < 65%RH
- 3) Be protected from direct sunlight and moisture
- 4) Shelf life: one year

Compliance With:



Contact US:

WHEN YOU HAVE QUESTION WITH DATA SHEET, WE COMPOUND THE ANSWER

//// SINHO ELECTRONIC TECHNOLOGY CO.,LTD//// West side of 27th building. Huli industrial. Xiamen City,China

////Tel: 0086-592-5635133 Fax: 0086-592-5750437 Email: Info@xmsinho.com