



RoHS Compliance

6	7		8		
RFV	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

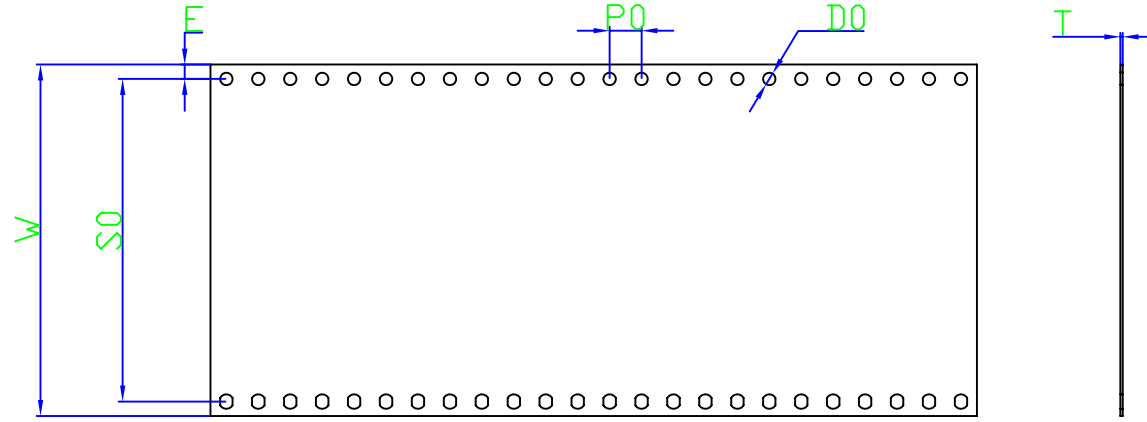

W	SO	E	PO	DO	T
32.00 ±0.30	28.40 ±0.10	1.75 ±0.10	4.00 ±0.10	1.50 +0.10 -0.00	0.30 ±0.05
44.00 ±0.30	40.40 ±0.10	1.75 ±0.10	4.00 ±0.10	1.50 +0.10 -0.00	0.30 ±0.05
56.00 ±0.30	52.40 ±0.10	1.75 ±0.10	4.00 ±0.10	1.50 +0.10 -0.00	0.30 ±0.05



1. The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
2. Cambers do not exceed 1.0mm in 250mm length
3. All dimension follow EIA-481-2A Series defination
4. Material: PS black & PS clear
5. One 19" Reel=400 Meters $\pm 20\text{cm}$

F SINHO ELECTRONIC TECHNOLOGY CO.,LTD	NAME.	Carrier tape just with sprocket holes	Mold Ref		SIZE	A4	DSGD		DIM TOL	Ang Tol
			Customer P/N		SHEET	1/1	PROJ		X ± 0.30 X.XX ± 0.10 X $\pm 5^\circ$ X.X ± 0.20 X.XXX ± 0.05 .XX $\pm 3^\circ$.XX $\pm 1^\circ$	
			SCALE	1:1	REV	A/0	CHKD			
	MATERIAL	BLACK & CLEAR	UNIT	MM	DATE	2018. 6. 6	APPD			

