


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE
 DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

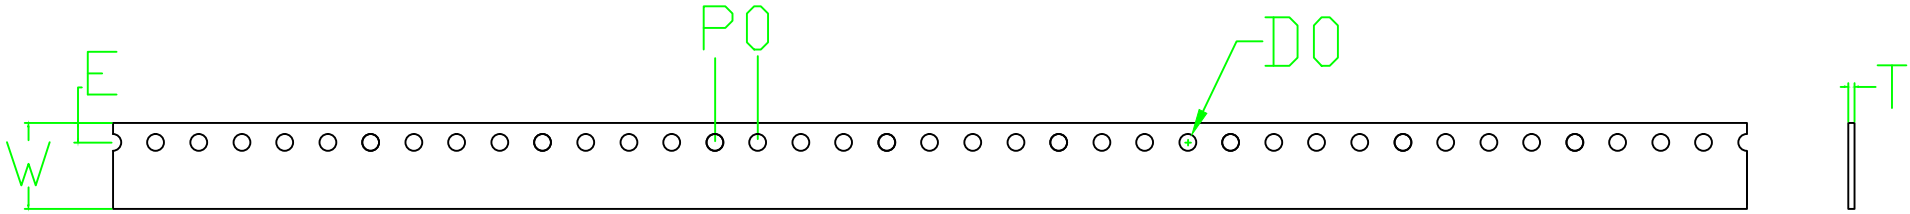

W	E	PO	DO	T
4.00 ±0.05	0.90 ±0.05	2.00 ±0.04	0.80 ±0.04	0.30 ±0.05

1. The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
2. Cambers do not exceed 1.0mm in 250mm length
3. All dimension follow EIA-481-2A Series definition
4. Material: PS black & PS clear
5. One 19" Reel=400 Meters $\pm 20\text{cm}$

RoHS Compliance	NAME.	Tape just with sprocket holes	Mold Ref	SIZE	A4	DSGD	DIM TOL	Ang Tol
			Customer P/N	SHEET	1/1	PROJ	X ±0.30 X.XX ±0.10 X ±5°	
			SCALE	REV	A/0	CHKD	.X ±3°	
			UNIT	DATE	APPD	X.X ±0.20 X.XXX ±0.05 .XX ±1°		
SINHO ELECTRONIC TECHNOLOGY CO.,LTD	MATERIAL	BLACK & CLEAR						