


RoHS Compliance

| REV. | MODIFICATION | DATE | DRAWING | CHECKED | APPROVED |
|------|--------------|------|---------|---------|----------|
| 1 | | | | | |
| 2 | | | | | |

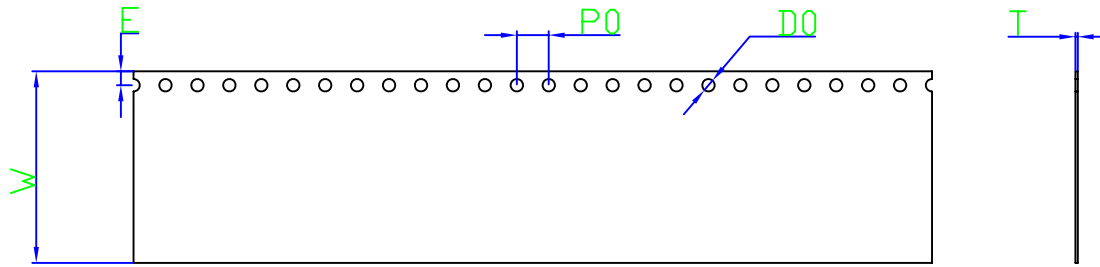

| W | E | P0 | D0 | T |
|----------------|---------------|---------------|------------------------|---------------|
| 8.00 ±0.30 | 1.75 ±0.10 | 4.00 ±0.10 | 1.50 +0.10 -0.00 | 0.30 ±0.05 |
| 12.00 ±0.30 | 1.75 ±0.10 | 4.00 ±0.10 | 1.50 +0.10 -0.00 | 0.30 ±0.05 |
| 16.00 ±0.30 | 1.75 ±0.10 | 4.00 ±0.10 | 1.50 +0.10 -0.00 | 0.30 ±0.05 |
| 24.00 ±0.30 | 1.75 ±0.10 | 4.00 ±0.10 | 1.50 +0.10 -0.00 | 0.30 ±0.05 |

1. The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
2. Cambers do not exceed 1.0mm in 250mm length
3. All dimension follow EIA-481-2A Series defination
4. Material: PS black & PS clear
5. One 19" Reel=400 Meters $\pm 20\text{cm}$

| | | | | | | | | | | |
|-------------------------------------|----------|---------------------------------------|--------------|-----|-------|------------|------|--|-----------|----------------------------|
| SINHO ELECTRONIC TECHNOLOGY CO.,LTD | NAME. | Carrier tape just with sprocket holes | Mold Ref | | SIZE | A4 | DSGD | | DIM TOL | Ang Tol |
| | | | Customer P/N | | SHEET | 1/1 | PROJ | | X ±0.30 | X.XX ±0.10 |
| | | | SCALE | 1:1 | REV | A/0 | CHKD | | X.X ±0.20 | X.XXX ±0.05 |
| | MATERIAL | BLACK & CLEAR | UNIT | MM | DATE | 2018. 6. 6 | APPD | | | X ±5° .X ±3° .XX ±1° |

