


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

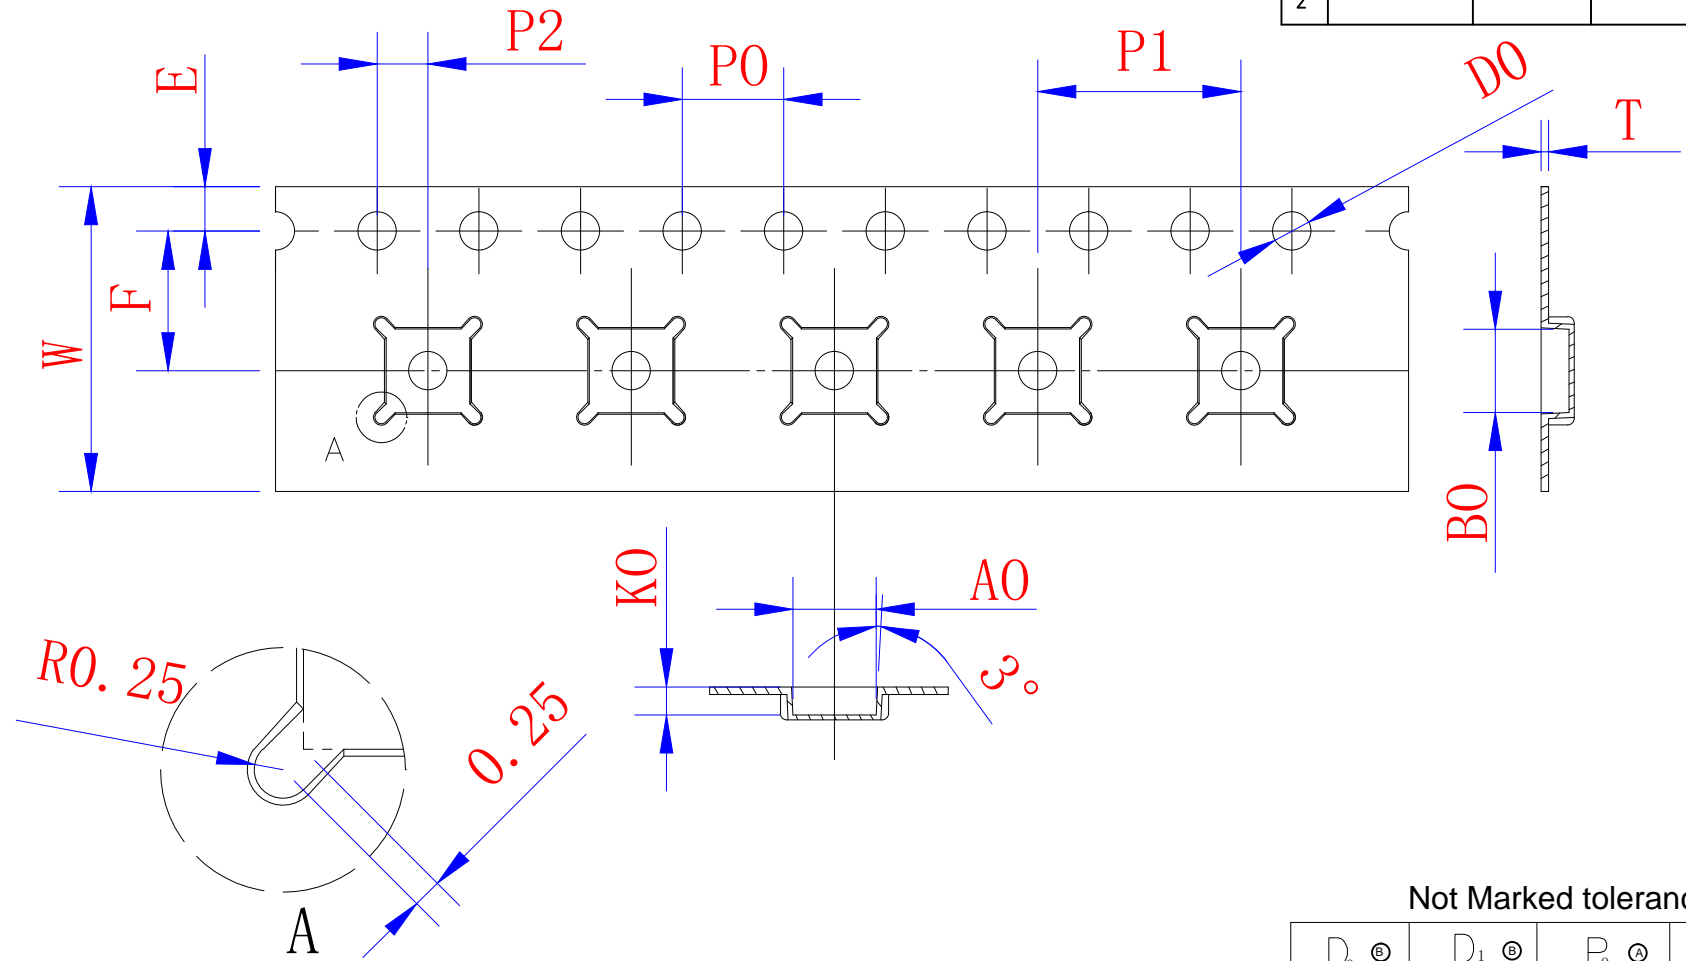

Not Marked tolerance ±0.2mm

$D_0$ $\text{Ⓢ}$	$D_1$ $\text{Ⓢ}$	$P_0$ $\text{Ⓢ}$	$P_2$ $\text{Ⓢ}$	$E$ $\text{Ⓢ}$						
1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	4.00 $\pm 0.10$	2.00 $\pm 0.10$	1.75 $\pm 0.10$						
ITEM	$W$ $\text{Ⓢ}$	$A_0$ $\text{Ⓢ}$	$A_1$ $\text{Ⓢ}$	$B_0$ $\text{Ⓢ}$	$B_1$ $\text{Ⓢ}$	$K_0$ $\text{Ⓢ}$	$K_1$ $\text{Ⓢ}$	$P_1$ $\text{Ⓢ}$	$F$ $\text{Ⓢ}$	$T$ $\text{Ⓢ}$
DIM	12.00 $\pm 0.30$	3.30 $\pm 0.10$	$\pm 0.10$	3.30 $\pm 0.10$	$\pm 0.10$	1.10 $\pm 0.10$	$\pm 0.10$	8.00 $\pm 0.10$	5.50 $\pm 0.10$	0.30 $\pm 0.05$
ALTERNATE										

- The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PS black
- One 22" Reel=159 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	QFN0300X0300D	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	3.30*3.30*1.10	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X.XX ±0.05	X ±5° X.XX ±3° X.XX ±1°
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05	.XX ±1°
			UNIT	MM	DATE	2021.6.8	APPD			