


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

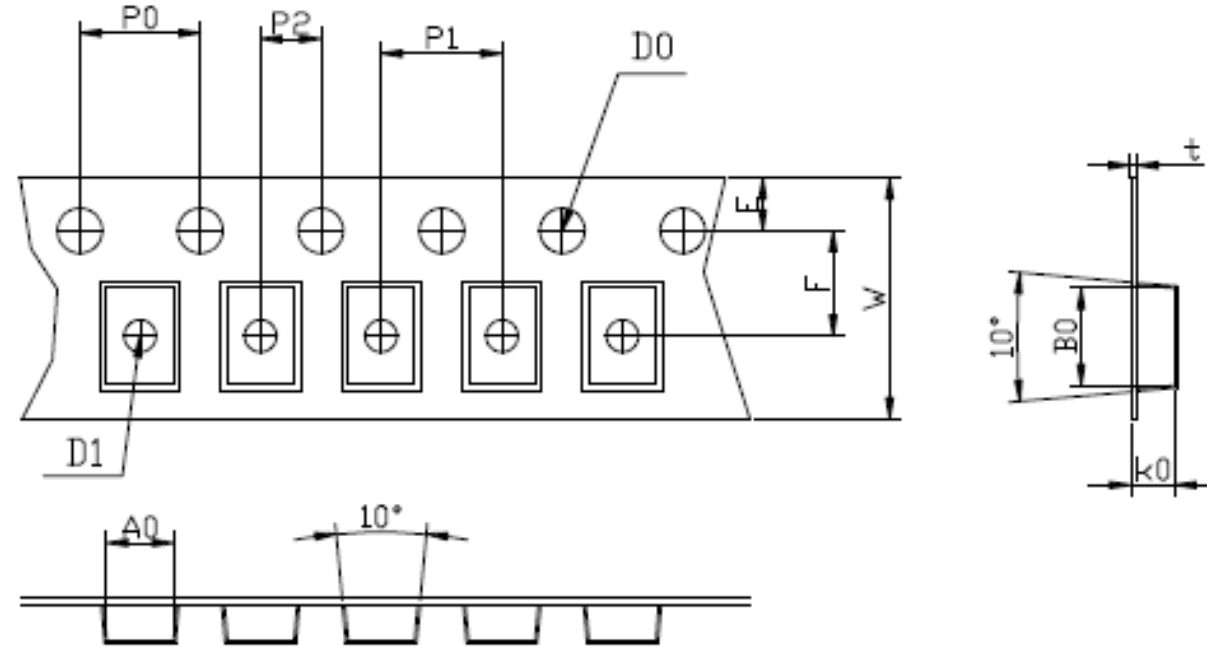

Not Marked tolerance ±0.2mm

D_0 Ⓞ	D_1 Ⓞ	P_0 Ⓞ	P_2 Ⓞ	E Ⓞ						
1.55 ±0.05	below 1.20	4.00 ±0.10	2.00 ±0.05	1.75 ±0.10						
ITEM	W Ⓞ	A_0 Ⓞ	A_1 Ⓞ	B_0 Ⓞ	B_1 Ⓞ	K_0 Ⓞ	K_1 Ⓞ	P_1 Ⓞ	F Ⓞ	T Ⓞ
DIM	8.00 ±0.10	2.20 ±0.10	±0.10	3.20 ±0.10	±0.10	1.45 ±0.10	±0.10	4.00 ±0.10	3.50 ±0.05	0.22 ±0.05
ALTERNATE										

- The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PC+S black conductive
- One 22" Reel=1000 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	1210-02	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	2.20*3.20*1.45	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X ±5'	.X ±3'
	MATERIAL	PC+S black conductive	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05 .XX ±1'	
			UNIT	MM	DATE		APPD			

