


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

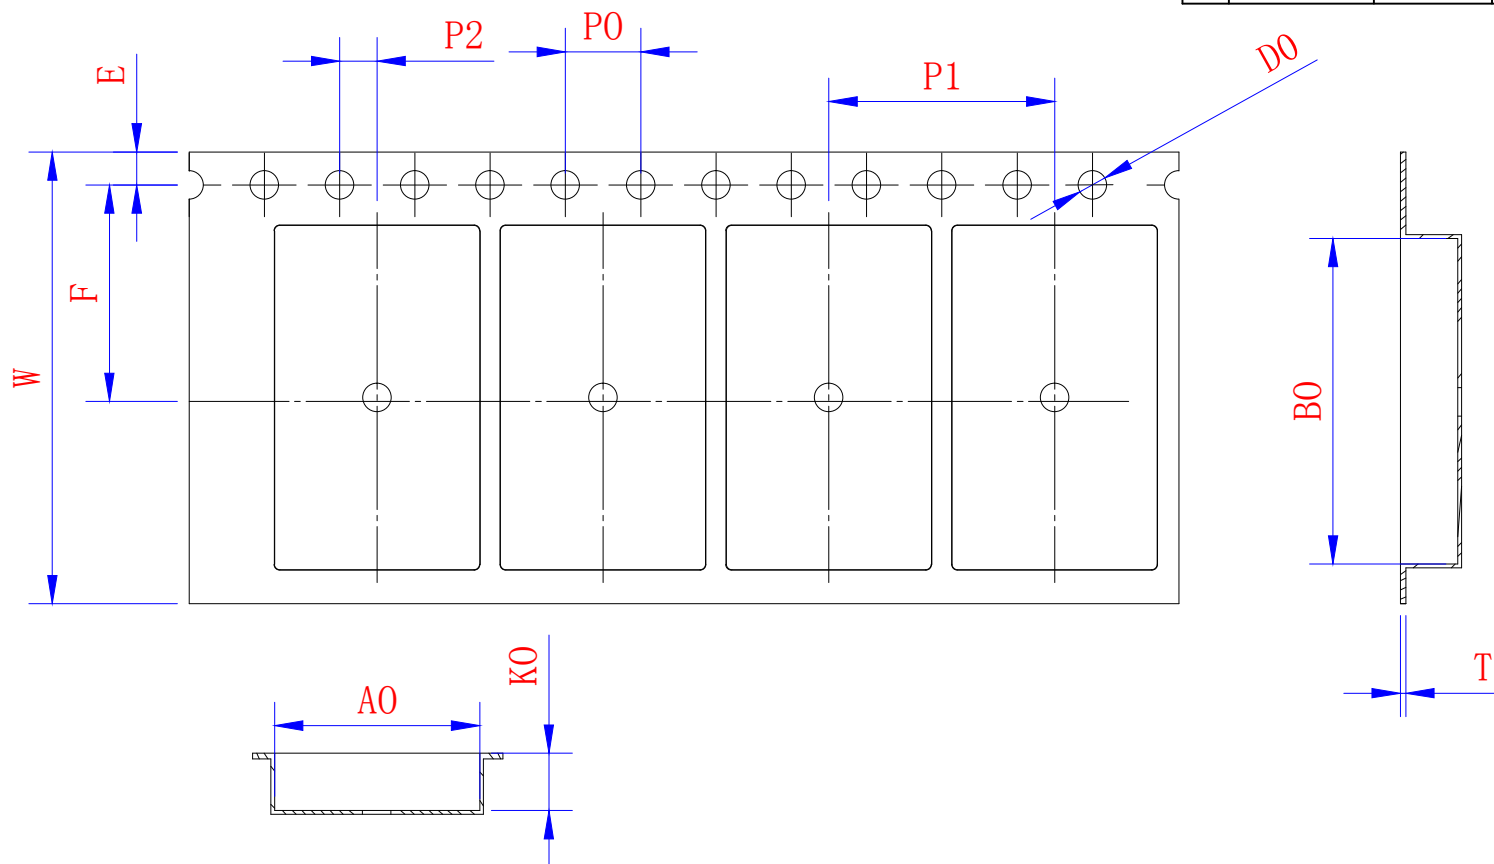

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 E	D_1 E	P_0 A	P_2 A	E A						
1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	1.50 $\begin{matrix} +0.10 \\ -0.00 \end{matrix}$	4.00 ± 0.10	2.00 ± 0.10	1.75 ± 0.10						
ITEM	W E	A ₀ A	A ₁ A	B ₀ A	B ₁ A	K ₀ C	K ₁ C	P ₁ A	F A	T E
DIM	24.00 ± 0.30	10.90 ± 0.10	± 0.10	18.30 ± 0.10	± 0.10	3.00 ± 0.10	± 0.10	12.00 ± 0.10	11.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

- 1.The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PS black
- 5.One 22" Reel=65 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SO28W	SIZE	A4	DSGD		DIM TOL	Ang Tol	
	Mold Ref	10.90*18.30*3.00	Customer P/N		SHEET	1/1	PROJ		X ± 0.30	X.XX ± 0.10	X $\pm 5'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20	.XXX ± 0.05	.XX $\pm 3'$
			UNIT	MM	DATE	2021.6.8	APPD				M A