
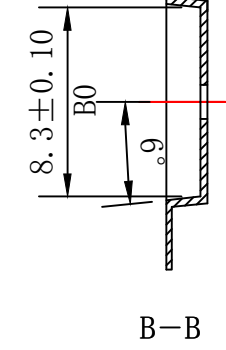





THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

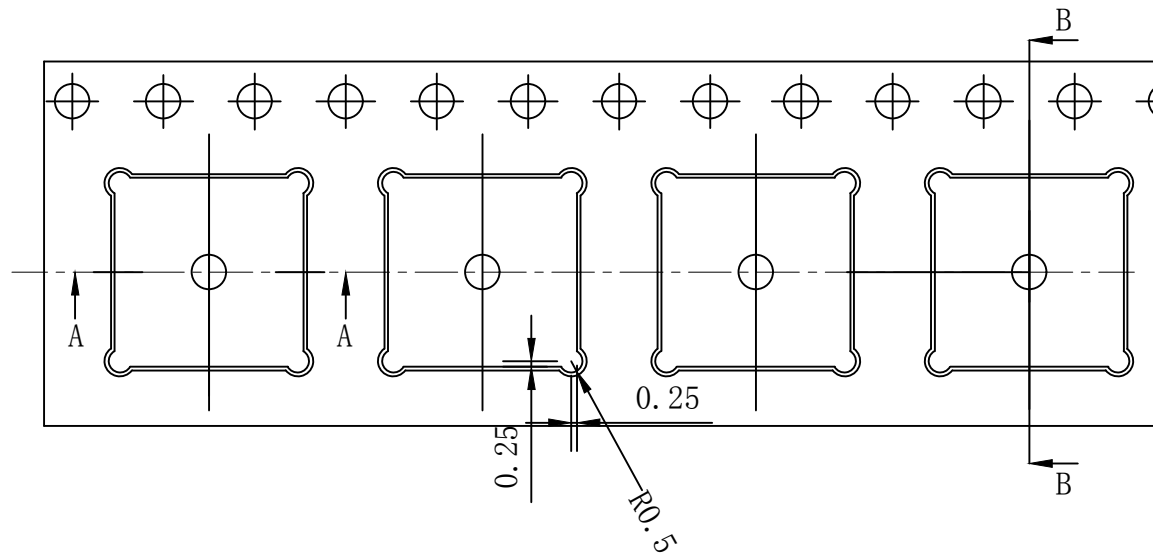

B-B

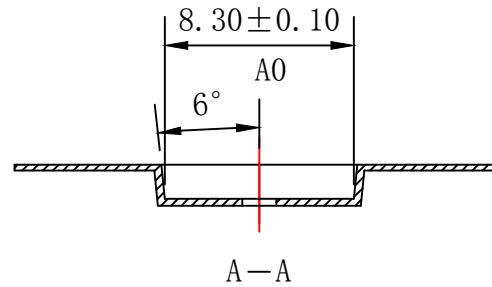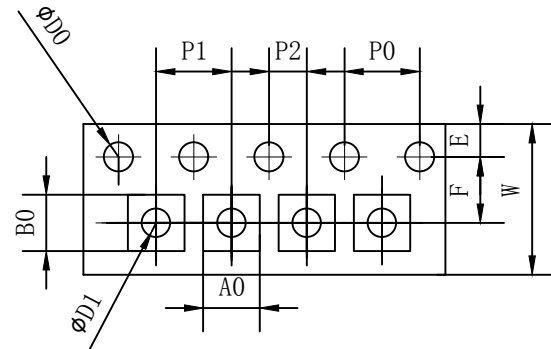

A-A

Not Marked tolerance $\pm 0.2\text{mm}$

D_0 Ⓜ	D_1 Ⓜ	P_0 Ⓜ	P_2 Ⓜ	E Ⓜ						
1.50 $\begin{smallmatrix} +0.10 \\ -0.00 \end{smallmatrix}$	1.50 $\begin{smallmatrix} +0.10 \\ -0.00 \end{smallmatrix}$	4.00 ± 0.10	2.00 ± 0.10	1.75 ± 0.10						
ITEM	W Ⓜ	A_0 Ⓜ	A_1 Ⓜ	B_0 Ⓜ	B_1 Ⓜ	K_0 Ⓜ	K_1 Ⓜ	P_1 Ⓜ	F Ⓜ	T Ⓜ
DIM	16.00 ± 0.30	8.30 ± 0.10	± 0.10	8.30 ± 0.10	± 0.10	1.10 ± 0.10	± 0.10	12.00 ± 0.10	7.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

- The Maximum cumulative tolerance is $\pm 0.2\text{mm}$ for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PS black
- One 22" Level wind=500 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	QFN8X8	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	8.30*8.30*1.10	Customer P/N		SHEET	1/1	PROJ		X ± 0.30 X.XX ± 0.10 X $\pm 5'$.X $\pm 3'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ± 0.20 X.XXX ± 0.05 .XX $\pm 1'$	
			UNIT	MM	DATE	2022-03-04	APPD			