


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

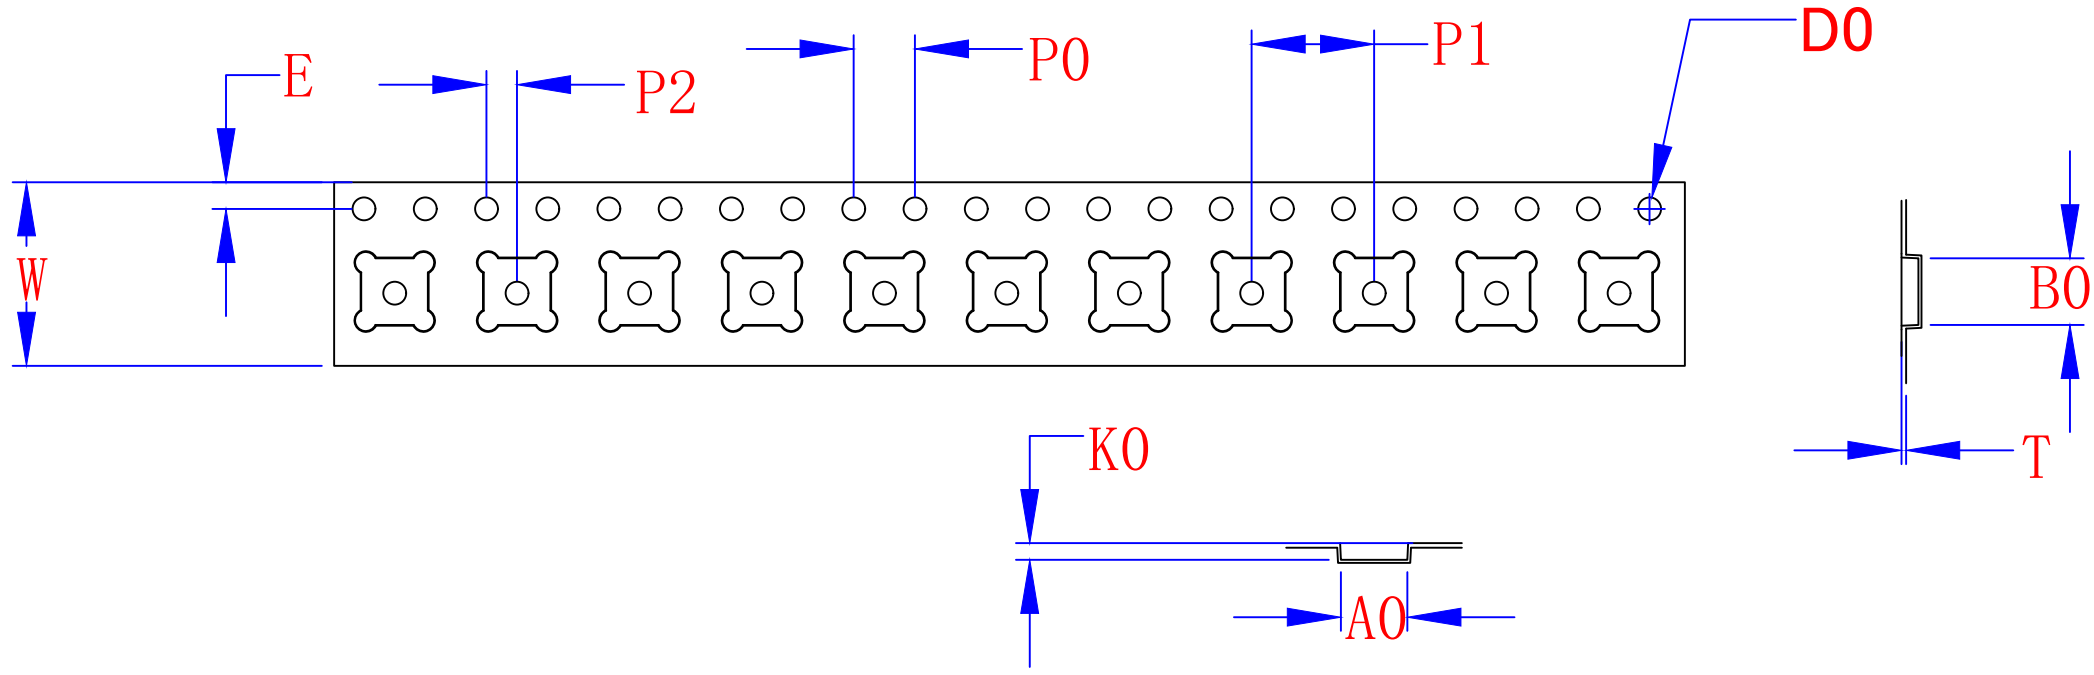

Not Marked tolerance ±0.2mm

D_0 Ⓢ	D_1 Ⓢ	P_0 Ⓢ	P_2 Ⓢ	E Ⓢ						
1.50 $\begin{smallmatrix} +0.10 \\ -0.00 \end{smallmatrix}$	1.50 $\begin{smallmatrix} +0.10 \\ -0.00 \end{smallmatrix}$	4.00 ± 0.10	2.00 ± 0.10	1.75 ± 0.10						
K_0 Ⓢ	K_1 Ⓢ	P_1 Ⓢ	F Ⓢ	T Ⓢ						
1.10 ± 0.10	± 0.10	8.00 ± 0.10	5.50 ± 0.10	0.30 ± 0.05						
ITEM	W Ⓢ	A_0 Ⓢ	A_1 Ⓢ	B_0 Ⓢ	B_1 Ⓢ	K_0 Ⓢ	K_1 Ⓢ	P_1 Ⓢ	F Ⓢ	T Ⓢ
DIM	12.00 ± 0.30	4.35 ± 0.10	± 0.10	4.35 ± 0.10	± 0.10	1.10 ± 0.10	± 0.10	8.00 ± 0.10	5.50 ± 0.10	0.30 ± 0.05
ALTERNATE										

- The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PS black
- One 22" Reel=99 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	QFN0400X0400D	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	4.35*4.35*1.10	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X.XX ±0.05	X ±5' X ±3' X ±1'
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05	.XX ±1'
			UNIT	MM	DATE	2018.7.23	APPD			

