


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

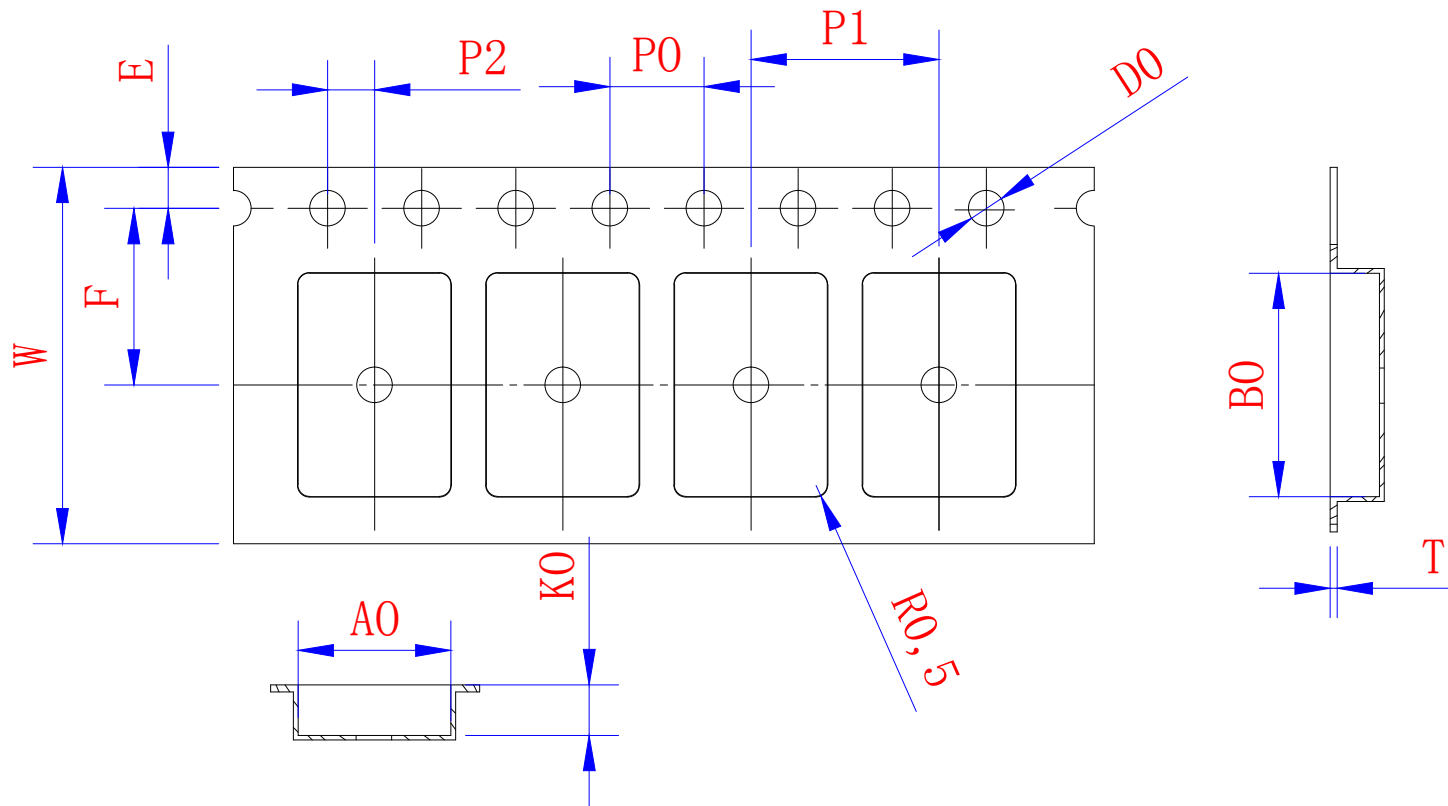

Not Marked tolerance  $\pm 0.2\text{mm}$

$D_0 \text{ (E)}$	$D_1 \text{ (E)}$	$P_0 \text{ (A)}$	$P_2 \text{ (A)}$	$E \text{ (A)}$						
1.50 $^{+0.10}_{-0.00}$	1.50 $^{+0.10}_{-0.00}$	4.00 $\pm 0.10$	2.00 $\pm 0.10$	1.75 $\pm 0.10$						
ITEM	W (E)	A <sub>0</sub> (A)	A <sub>1</sub> (A)	B <sub>0</sub> (A)	B <sub>1</sub> (A)	K <sub>0</sub> (C)	K <sub>1</sub> (C)	P <sub>1</sub> (A)	F (A)	T (E)
DIM	16.00 $\pm 0.30$	6.50 $\pm 0.10$	$\pm 0.10$	9.50 $\pm 0.10$	$\pm 0.10$	2.10 $\pm 0.10$	$\pm 0.10$	8.00 $\pm 0.10$	7.50 $\pm 0.10$	0.30 $\pm 0.05$
ALTERNATE										

- The Maximum cumulative tolerance is  $\pm 0.2\text{mm}$  for 10 sprocket hole pitch
- Cambers do not exceed 1.0mm in 250mm length
- All dimension follow EIA-481-D series definition
- Material: PS black
- One 22" Reel=90 Meters

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SO14N6	SIZE	A4	DSGD		DIM TOL	Ang Tol	
	Mold Ref	6.50*9.50*2.10	Customer P/N		SHEET	1/1	PROJ		X $\pm 0.30$	X.XX $\pm 0.10$	X $\pm 5'$
	MATERIAL	PS BLACK	SCALE	1:1	REV	A/0	CHKD		X.X $\pm 0.20$	XXX $\pm 0.05$	.XX $\pm 3'$
			UNIT	MM	DATE	2021.6.8	APPD				