


THE DIMENSIONS SHOWN ON THIS DESIGNED DRAWING ARE FOR ILLUSTRATIVE PURPOSE

DIMENSIONS FOR ACTUAL CARRIER TAPE MAY SLIGHTLY DIFFERENT

REV.	MODIFICATION	DATE	DRAWING	CHECKED	APPROVED
1					
2					

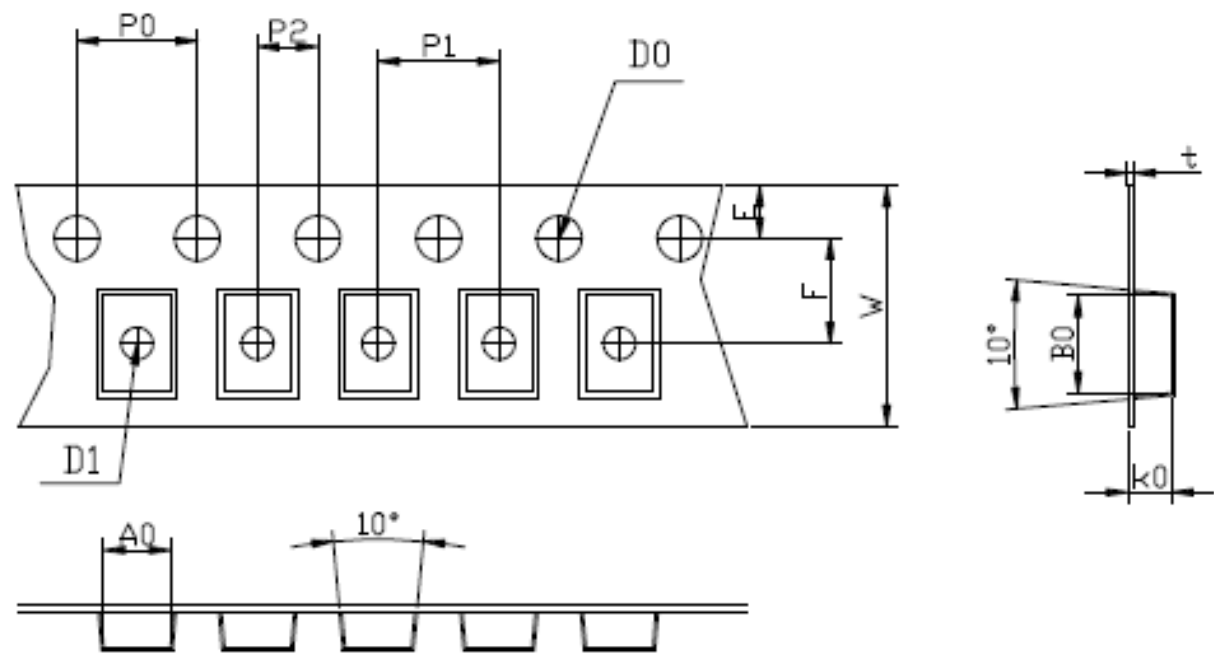

Not Marked tolerance ±0.2mm

- 1.The Maximum cumulative tolerance is ±0.2mm for 10 sprocket hole pitch
- 2.Cambers do not exceed 1.0mm in 250mm length
- 3.All dimension follow EIA-481-D series definition
- 4.Material: PC+S black conductive
- 5.One 22" Reel=1000 Meters

ITEM	W [Ⓢ]	A ₀ [Ⓢ]	A ₁ [Ⓢ]	B ₀ [Ⓢ]	B ₁ [Ⓢ]	K ₀ [Ⓢ]	K ₁ [Ⓢ]	P ₁ [Ⓢ]	F [Ⓢ]	T [Ⓢ]
D ₀ [Ⓢ]										
D ₁ [Ⓢ]										
P ₀ [Ⓢ]										
P ₂ [Ⓢ]										
E [Ⓢ]										
DIM	8.00 ±0.10	2.95 ±0.10	±0.10	3.10 ±0.10	±0.10	1.40 ±0.10	±0.10	4.00 ±0.10	3.50 ±0.05	0.22 ±0.05
ALTERNATE										

RoHS Compliance	NAME.	CARRIER TAPE	Part Number	SOT-143	SIZE	A4	DSGD		DIM TOL	Ang Tol
	Mold Ref	2.95*3.10*1.40	Customer P/N		SHEET	1/1	PROJ		X ±0.30 X.XX ±0.10 X ±5'	X ±3'
	MATERIAL	PC+S black conductive	SCALE	1:1	REV	A/0	CHKD		X.X ±0.20X.XXX ±0.05 .XX ±1'	
			UNIT	MM	DATE		APPD			

